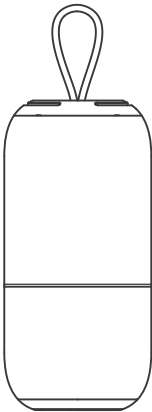
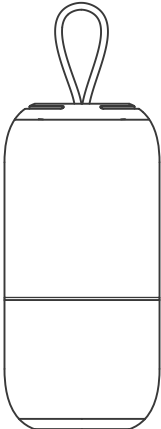



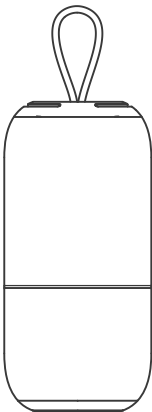
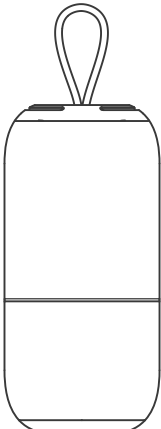




70x100MM 铜版纸正反印刷折页

BLUETOOTH SPEAKER Rezo Ledmi K310  User Manual Thank you for purchasing Bluetooth Speaker Rezo Ledmi K310. Please carefully read user guide in property and keep this for further reference.	Packing list  1 pc speaker  1 pc Type-C charging cable  1 pc user manual	Key function direction  ① Power Button ② Light Button ✱ ③ Mode Button M ④ Previous track/Volume down - ⑤ Next track/Volume up + ① Power On/Off Power On: Long press the power button for 3 seconds in the shutdown state; when the speaker starts up, the speaker will sound "ting, ting, ting" and the RGB light flashes. Power off: Long press the power button for 3 seconds in the boot state to shut down the speaker. The speaker will sound "ting, ting, ting" and the RGB light turns off. ② Light Butto ✱ Long press " ✱ " close/open lighting effects, click to switch the lights change effect.	③ Mode Button M Click on the " M " to switch the audio source mode bluetooth, FM mode, TF card;Playing MP3 files from Micro SD: 1. Insert Micro SD card into TF Slot. 2. Play, pause or skip a selected track using the controls on the speaker. FM mode: Press the M button into FM mode, shortpress power button to search station automatically, press again to stop searching. Then, short press "+", "-", to choose the FM station. Note: In the FM mode, need in charging cable to increase the FM radio signal ④ Previous track/Volume down - Short press "- " button when playing music, the player will play the last track; Long press "- " to decrease the volume continuously ⑤ Next track/Volume up + Short press " + " button when playing music, the player will play the next track; Long press " + " to increase the volume continuously Telephone function When calling on phone, short press the power button to answer the call, long press the power button to reject the call, double-click the power button to call back Type C charging 1. Charging with a DC5V~1A USB power adapter 2. When the speaker is fully charged, the red light will turn off.	Bluetooth Connection 1.Press and hold the power key for 3s to start the machine, there is a prompttone, Buetooth enters the pairing mode. 2.Turn on the mobile phone, turn on Bluetooth, search for the Bluetooth code name "Rezo Ledmi K310 " and click; after a few seconds, you will hear the prompt tone of successful pairing and connection, the mobile phone displays connected. 3.In subsequent use, as long as the device's bluetooth is turned on, it can be automatically connected. Note: If you want to connect to another device, double click "M" to disconnect the bluetooth connection. TWS function: While at the same time open two devices and dont connect in the bluetooth mode, double press M button of either of the speaker and then, you will hear the prompt tone of successful pairing and connection, You search for the Bluetooth code name "Rezo Ledmi K310" and click to use this function. Attentions: 1. Do not use abrasive cleaners to clean this product. 2. Do not allow this product to be heated, close to fire source or direct sunlight for a long time. It will easy to burn and damage the electronic components. 3. Do not attempt to disassemble this product to make any modifications. 4. Do not use this product in the rain. 5. If you do not plan to use this product for a long time, please store it in a dry environment and charge the speaker at least once a month to prolong its life and avoid extreme temperatures and dust. 6. If you saw smoke coming out of the machine or other improper phenomenon , please contact the retailer to solve the issue immediately. 7. Do not throw the machine. Note! In order to improve product performance, our products are constantly updated. It is no additional notice about technical issues and this manual is for reference only, please forgive. Thank you for your purchase.
--	--	---	---	---

LOA BLUETOOTH Rezo Ledmi K310  Hướng dẫn sử dụng Cảm ơn bạn đã lựa chọn Loa Bluetooth Rezo Ledmi K310. Vui lòng đọc kỹ hướng dẫn để sử dụng đúng cách và giữ lại để tham khảo thêm.	Bộ sản phẩm gồm  1 loa bluetooth  1 dây sạc loa type C  1 hướng dẫn sử dụng	Chức năng các phím  ① Nút nguồn ② Nút điều chỉnh đèn ✱ ③ Nút điều chỉnh chế độ M ④ Quay lại bài trước/ giảm âm lượng - ⑤ Đến bài tiếp theo/ tăng âm lượng + ① Bật / tắt nguồn Bật nguồn: Nhấn và giữ nút nguồn trong 3 giây ở trạng thái tắt máy, loa sẽ vang lên "ting, ting, ting" và đèn RGB sẽ sáng. Tắt nguồn: Nhấn và giữ nút nguồn trong 3 giây ở trạng thái khởi động để tắt loa, loa sẽ vang " ting ting ting" báo hiệu và đèn RGB sẽ tắt. ② Nút điều chỉnh đèn ✱ Nhấn và giữ " ✱ " ể đóng/mở hiệu ứng ánh sáng, nhấp để chuyển đổi hiệu ứng thay đổi đèn.	③ Nút M Nhấp vào " M ": để truy cập các dạng kết nối khác nhau: Bluetooth, chế độ FM, thè TF. Phát nhạc MP3 từ Micro SD: 1. Cắm thẻ Micro SD vào Khe cắm TF. 2. Phát, tạm dừng hoặc bỏ qua bản nhạc đã chọn bằng các nút điều khiển trên loa. Chế độ FM: Nhấn nút M để vào chế độ FM, nhấn nhanh nút nguồn để tự động tìm đài phát, nhấn lần nữa để dừng tìm kiếm. Sau đó, ấn nhanh nút "+", "-" để chọn kênh FM. Ghi chú: Ở chế độ FM, cần cắm cáp sạc để tăng tín hiệu đài FM. ④ Quay lại bài trước/ giảm âm lượng - Nhấn nhanh nút "- " khi phát nhạc, loa sẽ phát lại bài hát trước đó. Nhấn và giữ "- " để giảm âm lượng. ⑤ Đến bài tiếp theo/ tăng âm lượng + Nhấn nhanh nút "+ " khi phát nhạc, loa sẽ phát bài hát tiếp theo. Nhấn và giữ "+ " để tăng âm lượng liên tục. Chức năng cho cuộc gọi Khi có cuộc gọi đến trên điện thoại, bấm nhanh nút nguồn để trả lời, nhấn giữ để từ chối, bấm hai lần để gọi lại cuộc gọi gần nhất. Sạc Type C: 1. Sạc loa bằng bộ chuyển đổi USB DC-5V ~ 1A 2. Khi loa được sạc đầy, đèn màu đỏ sẽ tắt.	Kết nối Bluetooth 1. Nhấn và giữ phím nguồn trong 3s để khởi động máy, có âm báo nhắc, Bluetooth chuyển sang chế độ chờ ghép nối. 2. Bật điện thoại di động, bật Bluetooth, tìm kiếm tên Bluetooth "Rezo Ledmi K310" và nhấp vào; sau vài giây, bạn sẽ nghe thấy âm báo nhắc ghép nối và kết nối thành công, điện thoại di động hiển thị được kết nối. 3. Trong lần sử dụng tiếp theo, Loa có thể tự động kết nối khi Bluetooth của thiết bị mà được kết nối gần nhất đang mở. Lưu ý: Nếu muốn kết nối với thiết bị khác, nhấn hai lần nút M để ngắt kết nối bluetooth. Kết nối hai loa: Mở nguồn hai loa cùng một thời gian và ở trạng thái không kết nối bluetooth, nhấn hai lần nút M của 1 trong 2 loa để có thể kết nối hai loa với nhau. Bạn sẽ nghe tiếng báo hiệu cho sự kết nối thành công và sau đó tìm ở thiết bị kết nối Bluetooth với tên "Rezo Ledmi K310 " và nhấn vào để sử dụng chức năng này. Chú ý: 1. Không sử dụng chất tẩy rửa mài mòn để làm sạch sản phẩm. 2. Không để Loa bị làm nóng, gần nguồn lửa hoặc tiếp xúc trực tiếp với ánh nắng mặt trời trong thời gian dài, nó sẽ dễ làm cháy và hỏng các linh kiện điện tử. 3. Không cố gắng tháo rời sản phẩm này để thực hiện bất kỳ sửa đổi nào. 4. Không sử dụng sản phẩm này dưới trời mưa. 5. Nếu bạn không định sử dụng sản phẩm này trong một thời gian dài, vui lòng bảo quản nó ở nơi khô ráo và sạc loa ít nhất mỗi tháng một lần để kéo dài tuổi thọ của loa cũng như tránh nhiệt độ quá cao và bụi. 6. Nếu nhìn thấy khói bốc ra từ máy hoặc hiện tượng bất thường khác vui lòng liên hệ với nhà bán lẻ để giải quyết vấn đề ngay lập tức. 7. Không tác động mạnh hay để vật nặng lên loa. Ghi chú! Để nâng cao hiệu suất của sản phẩm, sản phẩm của chúng tôi được cập nhật liên tục. Nội dung có thể thay đổi mà không báo trước và sách hướng dẫn này chỉ mang tính chất tham khảo, mong bạn thứ lỗi. Cảm ơn bạn vì đã mua hàng.
---	---	--	---	--