














THONET & VANDER® | VERTRAG™ 2.0 speakers

QUICK GUIDE

_01 SYSTEM INSTALLATION

Connect the soundbar power supply to the electrical network.

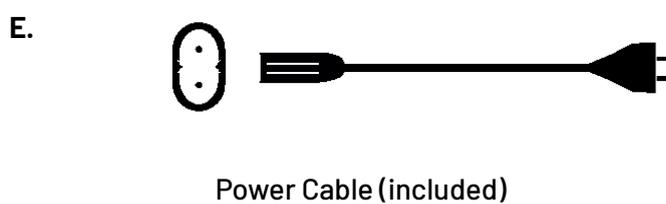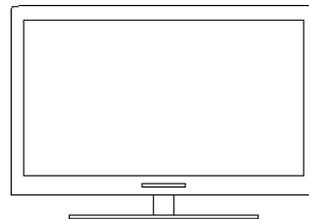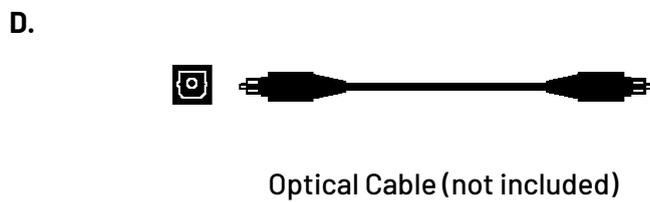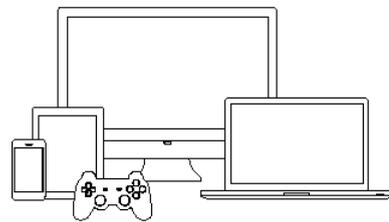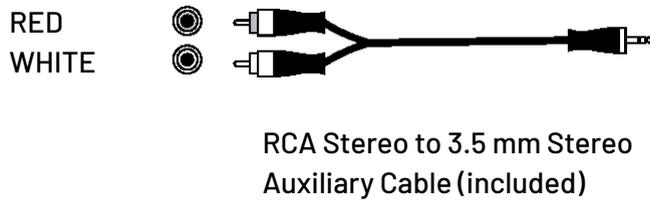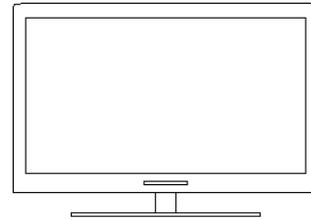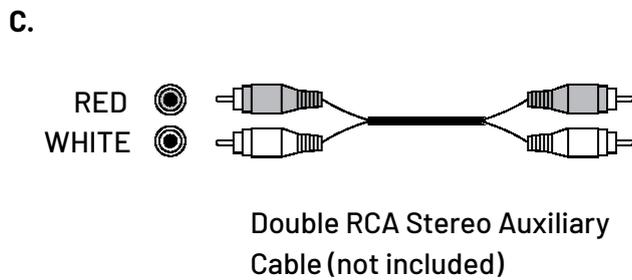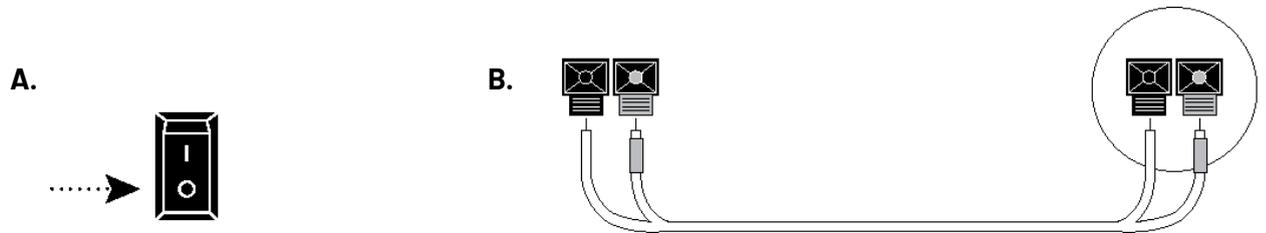

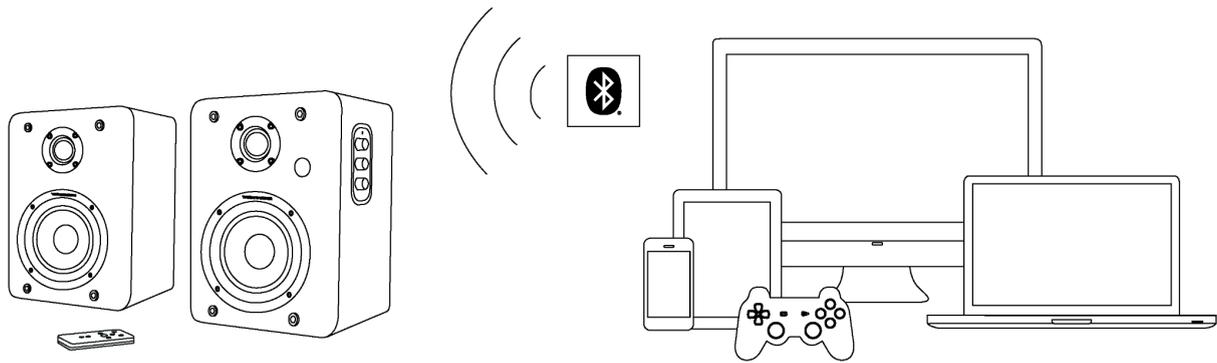


_02 BLUETOOTH® PAIRING

Switch on the speaker. A blue light will start blinking, this means the speaker is in pairing mode. Turn on Bluetooth® on your device (smartphone, tablet, PC, etc.) and select VERTRAG BT™ to pair the speaker. The light will stop blinking once the connection is established. If pairing fails, try again. If you require further support, please send an e-mail to support@thonet-vander.com. For switching from any other mode to Bluetooth® mode, press the BT button [5] on your remote control or go to the Speaker Side Panel and press the Volume button [B] for 2 seconds.

_03 VOLUME CONTROL | From Side Panel

- A_** Mode LED on
- B_** Digital Volume Control / Mode button
(Switch Bluetooth®, Optical, Aux mode by pressing this button for 2 seconds)
- C_** Adjust treble or high frequencies
- D_** Adjust bass or low frequencies

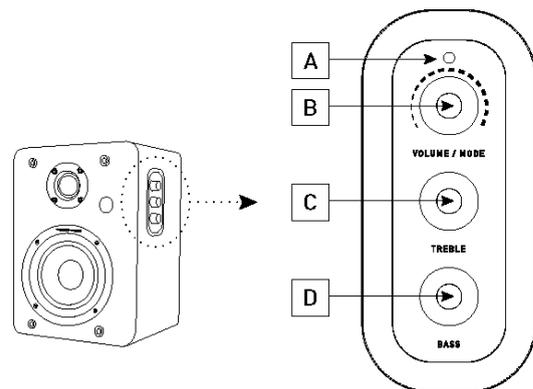


_04 REMOTE CONTROL

REMOTE CONTROL

- 1_** Stand by mode
- 2_** Mute
- 3_** Bluetooth® pairing mode (hold press)
- 4_** Optical input
- 5_** Bluetooth® input
- 6_** Auxiliary RCA / Jack 3.5 mm input
- 7_** Increase Volume
- 8_** Decrease Volume

LED ACTION [A]

- on Side Panel
- 1_** Steady red light
 - 2_** Blinking red, green or blue light
 - 3_** Blue light blinking
 - 4_** Steady green light
 - 5_** Steady blue light
 - 6_** Steady green light

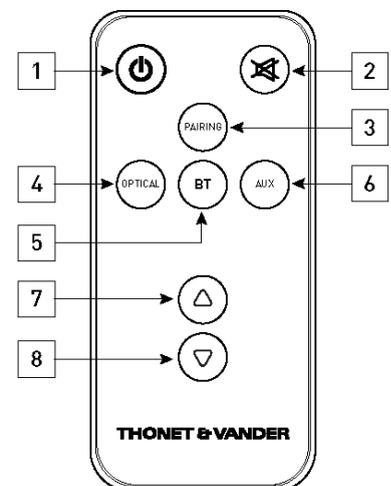

_05 ACCESORIES | Our VERTRAG BT™ 2.0 speakers include:

- _ Remote Control
 - _ RCA Stereo to 3.5 mm Stereo Auxiliary Cable
 - _ Transparent cable for connecting passive speaker
 - _ Power cable (plug IEC 60320 C7)* or power cable with ground tab (plug IEC 60320 C7)* or UK (plug BS 1363)*
- (* according to country)