

Inspiron 3501

Setup and Specifications



Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Contents

Chapter 1: Set up your Inspiron 3501.....	4
Chapter 2: Views of Inspiron 3501.....	6
Right.....	6
Left.....	6
Top.....	7
Front.....	8
Bottom.....	9
Chapter 3: Specifications of Inspiron 3501.....	10
Dimensions and weight.....	10
Processor.....	10
Chipset.....	11
Operating system.....	11
Memory.....	11
External ports.....	12
Internal slots.....	12
Ethernet.....	13
Wireless module.....	13
Audio.....	13
Storage.....	14
Intel Optane Memory H10 with Solid State Storage (optional).....	14
Media-card reader.....	15
Keyboard.....	15
Camera.....	16
Touchpad.....	16
Power adapter.....	17
Battery.....	17
Display.....	18
Fingerprint reader (optional).....	19
GPU—Integrated.....	19
GPU—Discrete.....	19
Operating and storage environment.....	20
Chapter 4: Keyboard shortcuts.....	21
Chapter 5: Getting help and contacting Dell.....	24

Set up your Inspiron 3501

NOTE: The images in this document may differ from your computer depending on the configuration you ordered.

1. Connect the power adapter and press the power button.



NOTE: To conserve battery power, the battery might enter power saving mode. Connect the power adapter and press the power button to turn on the computer.

2. Finish operating system setup.

For Ubuntu:

Follow the on-screen instructions to complete the setup. For more information about installing and configuring Ubuntu, see the knowledge base articles [SLN151664](#) and [SLN151748](#) at www.dell.com/support.

For Windows:

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:

- Connect to a network for Windows updates.
 - NOTE:** If connecting to a secured wireless network, enter the password for the wireless network access when prompted.
- If connected to the internet, sign-in with or create a Microsoft account. If not connected to the internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu—Recommended.

Table 1. Locate Dell apps






Resources	Description
	<p>My Dell</p> <p>Centralized location for key Dell applications, help articles, and other important information about your computer. It also notifies you about the warranty status, recommended accessories, and software updates if available.</p>

Table 1. Locate Dell apps

Resources	Description
	<p>SupportAssist</p> <p>SupportAssist proactively and predictively identifies hardware and software issues on your computer and automates the engagement process with Dell Technical support. It addresses performance and stabilization issues, prevents security threats, monitors and detects hardware failures. For more information, see SupportAssist for Home PCs User's Guide on www.dell.com/serviceabilitytools. To navigate to SupportAssist for Home PCs User's Guide, click SupportAssist and then, click SupportAssist for Home PCs User's Guide.</p> <p> NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.</p>
	<p>Dell Update</p> <p>Updates your computer with critical fixes and latest device drivers as they become available. For more information about using Dell Update, see the knowledge base article SLN305843 at www.dell.com/support.</p>
	<p>Dell Digital Delivery</p> <p>Download software applications, which are purchased but not pre-installed on your computer. For more information about using Dell Digital Delivery, see the knowledge base article 153764 at www.dell.com/support.</p>

Views of Inspiron 3501

Right



1. SD-card slot

Reads from and writes to the SD card. The computer supports the following card types:

- Secure Digital (SD)
- Secure Digital High Capacity (SDHC)
- Secure Digital Extended Capacity (SDXC)


2. USB 2.0 port

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 480 Mbps.

3. Security-cable slot (wedge-shaped)

Connect a security cable to prevent unauthorized movement of your computer.

Left

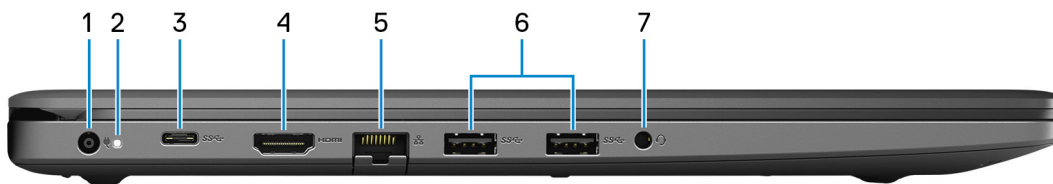

1. Power-adaptor port

Connect a power adaptor to provide power to your computer and charge the battery.

2. Power and battery-status light/hard-drive activity light

Indicates the battery-charge status or the hard-drive activity.

NOTE: Press Fn+H to switch between the power and battery-status light, and hard-drive activity light.

Hard-drive activity light

Turns on when the computer reads from or writes to the hard drive.

Power and battery-status light

Indicates the power and battery-charge status.

Solid white—Power adaptor is connected and the battery has more than 5% charge.

Amber—Computer is running on battery and the battery has less than 5% charge.

Off

- Power adapter is connected, and the battery is fully charged.
- Computer is running on battery, and the battery has more than 5% charge.
- Computer is in sleep state, hibernation, or turned off.

3. USB 3.2 Gen 1 (Type-C) port (optional)

Connect peripherals such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

4. HDMI port

Connect to a TV, external display or another HDMI-in enabled device. Provides video and audio output.

5. Network port

Connect an Ethernet (RJ45) cable from a router or a broadband modem for network or Internet access.

6. USB 3.2 Gen 1 ports (2)


Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

7. Headset jack

Connect headphones or a headset (headphone and microphone combo).

i **NOTE:** The 3.5 mm headset jack functionality varies by model configuration. For best results, Use Dell recommended audio accessories.

Top

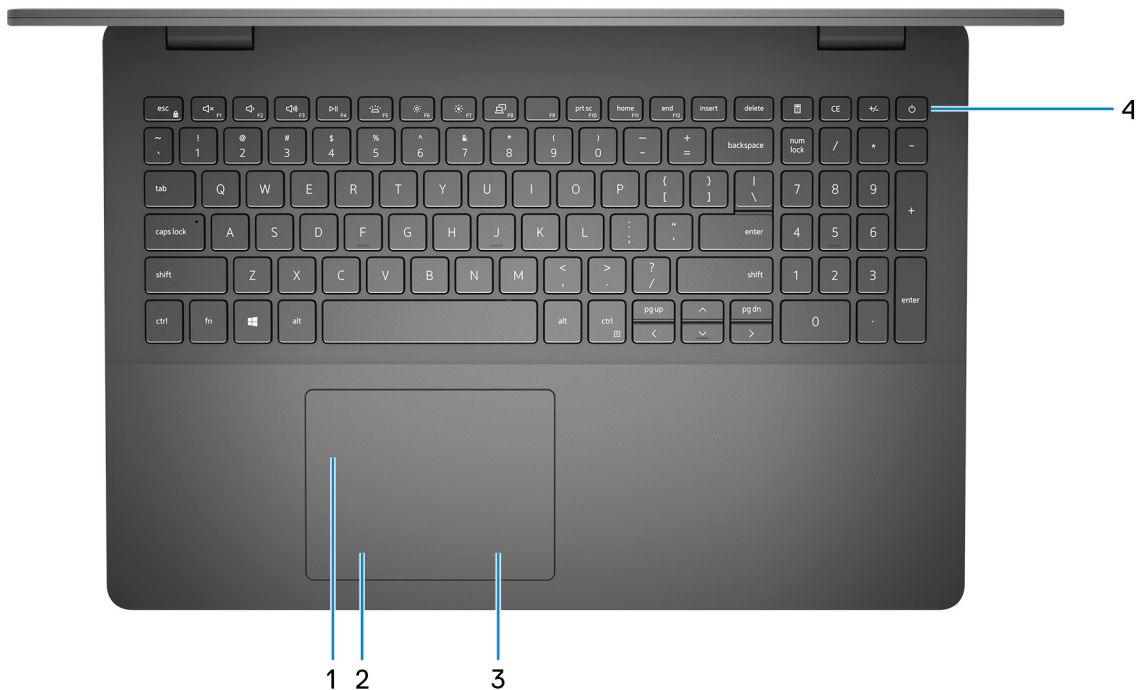

1. Touchpad

Move your finger on the touchpad to move the mouse pointer. Tap to left-click and two fingers tap to right-click.

2. Left-click area

Press to left-click.

3. Right-click area

Press to right-click.

4. Power button with optional fingerprint reader

Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

When the computer is turned on, press the power button to put the computer into sleep state; press and hold the power button for 10 seconds to force shut-down the computer.


If the power button has a fingerprint reader, place your finger on the power button to log in.

NOTE: You can customize power-button behavior in Windows. For more information, see *Me and My Dell* at www.dell.com/support/manuals.

NOTE: The power-status light on the power button is available only on computers without the fingerprint reader. Computers that are shipped with the fingerprint reader that is integrated on the power button will not have the power-status light on the power button.

NOTE: To reset the battery, press and hold the power button for 25 seconds.

Front

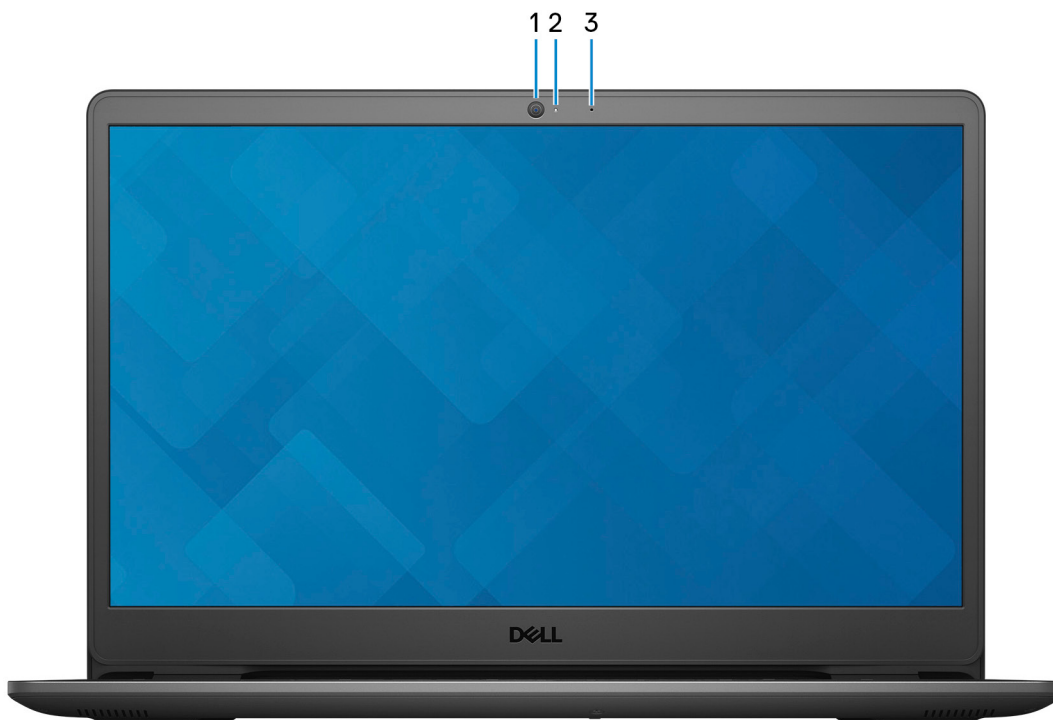

1. Camera

Enables you to video chat, capture photos, and record videos.

2. Camera-status light

Turns on when the camera is in use.

3. Microphone

Provides digital sound input for audio recording, voice calls, and so on.

Bottom



1. Left speaker

Provides audio output.

2. Service Tag label

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.

3. Right speaker


Provides audio output.

Specifications of Inspiron 3501

Dimensions and weight

The following table lists the height, width, depth, and weight of your Inspiron 3501.

Table 2. Dimensions and weight

Description	Values
Height:	
Front height	18 mm (0.71 in.)
Rear height	19.90 mm (0.78 in.)
Width	363.96 mm (14.33 in.)
Depth	249 mm (9.80 in.)
Weight	1.96 kg (4.32 lb)
 NOTE: The weight of your computer depends on the configuration ordered and manufacturing variability.	

Processor

The following table lists the details of the processors that are supported by your Inspiron 3501 .

Table 3. Processor

Description	Option one	Option two	Option three	Option four	Option five	Option six	Option seven	Option eight
Processor type	10 th Generation Intel Core i3-1005G1	Intel Celeron N4020	Intel Celeron 6305	Intel Pentium Silver N5030	Intel Pentium Gold 7505	11 th Generation Intel Core i3-1115G4	11 th Generation Intel Core i5-1135G7	11 th Generation Intel Core i7-1165G7
Processor wattage	15 W	6 W	15 W	6 W	15 W	13 W	13 W	13 W
Processor core count	2	2	2	4	2	2	4	4
Processor thread count	4	2	2	4	4	4	8	8
Processor speed	Up to 3.4 GHz	Up to 2.8 GHz	Up to 1.8 GHz	Up to 3.1 GHz	Up to 3.5 GHz	Up to 4.1 GHz	Up to 4.2 GHz	Up to 4.7 GHz
Processor cache	4 MB	4 MB	4 MB	4 MB	4 MB	6 MB	8 MB	12 MB

Table 3. Processor

Description	Option one	Option two	Option three	Option four	Option five	Option six	Option seven	Option eight
Integrated graphics	Intel UHD Graphics	Intel UHD Graphics	Intel UHD Graphics	Intel UHD Graphics	Intel UHD Graphics	Intel UHD Graphics	Intel Iris Xe Graphics	Intel Iris Xe Graphics

Chipset

The following table lists the details of the chipset supported by your Inspiron 3501.

Table 4. Chipset

Description	Option one	Option two	Option three
Processors	10 th Generation Intel Core i3-1005G1	<ul style="list-style-type: none"> Intel Pentium Celeron Intel Pentium Silver/Gold 	11 th Generation Intel Core i3/i5/i7
Chipset	Integrated in the processor	Integrated in the processor	Integrated in the processor
DRAM bus width	64-bit	64-bit	64-bit
Flash EPROM	16 MB + 8 MB	16 MB + 8 MB	16 MB + 8 MB
PCIe bus	Up to Gen3	Up to Gen3	Up to Gen3

Operating system

Your Inspiron 3501 supports the following operating systems:

- Windows 10 Home, 64-bit
- Windows 10 Pro, 64-bit
- Windows 10 Home in S, 64-bit
- Ubuntu 20.04 LTS, 64-bit

Memory

The following table lists the memory specifications of your Inspiron 3501.

Table 5. Memory specifications (continued)

Description	Values
Memory slots	Two SoDIMM slots
Memory type	Dual-channel DDR4
Memory speed	2666 MHz, 3200 MHz
Maximum memory configuration	16 GB
Minimum memory configuration	4 GB
Memory size per slot	4 GB, 8 GB, and 16 GB
Memory configurations supported	<ul style="list-style-type: none"> 4 GB, (1 x 4 GB), DDR4, 2666/3200 MHz 8 GB, (2 x 4 GB), DDR4, 2666/3200 MHz, dual-channel

Table 5. Memory specifications

Description	Values
	<ul style="list-style-type: none"> • 8 GB, (1 x 8 GB), DDR4, 2666/3200 MHz • 12 GB, (1 x 4 GB + 1 x 8 GB), DDR4, 2666/3200 MHz, dual-channel • 16 GB, (2 x 8 GB), DDR4, 2666/3200 MHz, dual-channel • 16 GB, (1 x 16 GB), DDR4, 2666/3200 MHz

External ports

The following table lists the external ports of your Inspiron 3501.

Table 6. External ports

Description	Values
Network port	One RJ-45
USB ports	<ul style="list-style-type: none"> • Two USB 3.2 Gen 1 • One USB 2.0 • One USB 3.2 Gen 1 Type-C port (optional)
Audio port	One headset jack <i>i</i> NOTE: The 3.5 mm headset jack functionality varies by model configuration. For best results, Use Dell recommended audio accessories.
Video port	One HDMI 1.4 port
Media-card reader	One SD-card slot
Power-adaptor port	4.5 mm barrel
Security-cable slot	One security-cable slot (wedge-shaped)

Internal slots

The following table lists the internal slots of your Inspiron 3501.

Table 7. Internal slots

Description	Values
M.2	<ul style="list-style-type: none"> • One M.2 2230 slot for WiFi and Bluetooth combo card • One M.2 2230/2280 slot for solid-state drive/Intel Optane H10 <i>i</i> NOTE: To learn more about the features of different types of M.2 cards, see the knowledge base article 000144170 at www.dell.com/support .

Ethernet

The following table lists the wired Ethernet Local Area Network (LAN) specifications of your Inspiron 3501.

Table 8. Ethernet specifications

Description	Values
Model number	Ethernet controller integrated to the system board
Transfer rate	<ul style="list-style-type: none"> 10/100 Mbps 10/100/1000 Mbps

Wireless module

The following table lists the Wireless Local Area Network (WLAN) module specifications of your Inspiron 3501.

Table 9. Wireless module specifications

Description	Option one	Option two	Option three
Model number	Qualcomm QCA9377 (DW1810)	Intel 9462	Realtek RTL8723DE
Transfer rate	Up to 433 Mbps	Up to 433 Mbps	Up to 150 Mbps
Frequency bands supported	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz
Wireless standards	<ul style="list-style-type: none"> WiFi 802.11a/b/g Wi-Fi 4 (WiFi 802.11n) Wi-Fi 5 (WiFi 802.11ac) 	<ul style="list-style-type: none"> WiFi 802.11a/b/g Wi-Fi 4 (WiFi 802.11n) Wi-Fi 5 (WiFi 802.11ac) 	<ul style="list-style-type: none"> WiFi 802.11b/g Wi-Fi 4 (WiFi 802.11n)
Encryption	<ul style="list-style-type: none"> 64-bit/128-bit WEP AES-CCMP TKIP 	<ul style="list-style-type: none"> 64-bit/128-bit WEP AES-CCMP TKIP 	<ul style="list-style-type: none"> 64-bit/128-bit WEP AES-CCMP TKIP
Bluetooth	Bluetooth 5.0	Bluetooth 5.0	Bluetooth 5.0

Audio

The following table lists the audio specifications of your Inspiron 3501.

Table 10. Audio specifications


Description	Values
Audio controller	<ul style="list-style-type: none"> Realtek ALC3204 Cirrus Logic CS8409 (CS42L42 + SN005825)
Stereo conversion	Supported
Internal audio interface	High-definition audio interface
External audio interface	One headset jack  NOTE: The 3.5 mm headset jack functionality varies by model configuration. For best results, use Dell recommended audio accessories.

Table 10. Audio specifications

Description		Values
Number of speakers		2
Internal-speaker amplifier		Supported
External volume controls		Keyboard shortcut controls
Speaker output:		
	Average speaker output	2 W
	Peak speaker output	2.5 W
Subwoofer output		Not supported
Microphone		Single-digital microphone

Storage

This section lists the storage options on your Inspiron 3501.

Your Inspiron 15 3501 supports one of the following storage configurations:

- One 2.5-inch hard drive
- One M.2 2230/2280 solid-state drive/Intel Optane H10
- One 2.5-inch hard-drive and one M.2 2230/2280 solid-state drive/Intel Optane H10

The primary drive of your Inspiron 15 3501 varies with the storage configuration. For computers:

- with a 2.5-inch hard-drive, the 2.5-inch hard-drive is the primary drive
- with a M.2 2230/2280 drive, the M.2 2230/2280 drive is the primary drive
- with a 2.5-inch hard-drive and one M.2 2230/2280 solid-state drive/Intel Optane H10, the M.2 2230/2280 solid-state drive/Intel Optane H10 is the primary drive

Table 11. Storage specifications

Storage type	Interface type	Capacity
One 2.5-inch hard-drive	SATA AHCI, up to 6 Gbps	Up to 2 TB
One M.2 2230/2280 solid-state drive	PCIe Gen3 x4 NVMe, up to 32 Gbps	Up to 1 TB
One M.2 2280 Intel Optane H10	PCIe Gen3 x2 NVMe, up to 16 Gbps	Up to 512 GB

Intel Optane Memory H10 with Solid State Storage (optional)

Intel Optane Memory technology utilizes 3D XPoint memory technology and functions as a non-volatile storage cache/accelerator and/or storage device depending on the Intel Optane Memory installed in your computer.

Intel Optane Memory H10 with Solid State Storage functions as both a non-volatile storage cache/accelerator (enabling enhanced read/write speeds for hard-drive storage) and a solid-state storage solution. It neither replaces nor adds to the memory (RAM) installed on your computer.

Table 12. Intel Optane Memory H10 with Solid State Storage specifications

Description	Values
Interface	PCIe 3 x4 NVMe

Table 12. Intel Optane Memory H10 with Solid State Storage specifications (continued)

Description	Values
	<ul style="list-style-type: none"> One PCIe 3 x2 for Optane memory One PCIe 3 x2 for solid-state storage
Connector	M.2
Form factor	2280
Capacity (Intel Optane memory)	Up to 32 GB
Capacity (solid-state storage)	Up to 512 GB

NOTE: Intel Optane Memory H10 with Solid State Storage is supported on computers that meet the following requirements:

- 9th Generation or higher Intel Core i3/i5/i7 processors
- Windows 10 64-bit version or higher (Anniversary Update)
- Intel Rapid Storage Technology driver version 15.9.1.1018 or higher

Media-card reader

The following table lists the media cards supported by your Inspiron 3501.

Table 13. Media-card reader specifications

Description	Values
Media-card type	One SD-card slot
Media-cards supported	<ul style="list-style-type: none"> Secure Digital (SD) Secure Digital High Capacity (SDHC) Secure Digital Extended Capacity (SDXC)
<p>NOTE: The maximum capacity supported by the media-card reader varies depending on the standard of the media card installed in your computer.</p>	

Keyboard

The following table lists the keyboard specifications of your Inspiron 3501.

Table 14. Keyboard specifications

Description	Values
Keyboard type	<ul style="list-style-type: none"> Standard keyboard Backlit keyboard
Keyboard layout	QWERTY
Number of keys	<ul style="list-style-type: none"> United States and Canada: 101 keys United Kingdom: 102 keys Japan: 105 keys
Keyboard size	X=18.70 mm key pitch Y=18.05 mm key pitch

Table 14. Keyboard specifications

Description	Values
Keyboard shortcuts	<p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.</p> <p>NOTE: You can define the primary behavior of the function keys (F1–F12) changing Function Key Behavior in BIOS setup program.</p> <p>For more information, see keyboard shortcuts.Keyboard shortcuts</p>

Camera

The following table lists the camera specifications of your Inspiron 3501.

Table 15. Camera specifications

Description	Values
Number of cameras	One
Camera type	RGB HD camera
Camera location	Front
Camera sensor type	CMOS sensor technology
Camera resolution:	
Still image	0.92 megapixel
Video	1280 x 720 (HD) at 30 fps
Diagonal viewing angle:	78.6 degrees

Touchpad

The following table lists the touchpad specifications of your Inspiron 3501.

Table 16. Touchpad specifications

Description	Values
Touchpad resolution:	
Horizontal	<ul style="list-style-type: none">• Synaptics: 1230• Lite-on: 1920
Vertical	<ul style="list-style-type: none">• Synaptics: 930• Lite-on: 1080
Touchpad dimensions:	
Horizontal	105 mm (4.13 in.)
Vertical	80 mm (3.15 in.)

Table 16. Touchpad specifications

Description	Values
Touchpad gestures	For more information about touchpad gestures available on Windows 10, see the Microsoft knowledge base article 4027871 at support.microsoft.com .

Power adapter

The following table lists the power adapter specifications of your Inspiron 3501.

Table 17. Power adapter specifications

Description	Option one	Option two
Type	45 W	65 W
Connector dimensions:		
External diameter	4.50 mm	4.50 mm
Internal diameter	2.90 mm	2.90 mm
Input voltage	100 VAC–240 VAC	100 VAC–240 VAC
Input frequency	50 Hz–60 Hz	50 Hz–60 Hz
Input current (maximum)	1.30 A	1.60 A / 1.70 A
Output current (continuous)	2.31 A	3.34 A
Rated output voltage	19.50 VDC	19.50 VDC
Temperature range:		
Operating	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)
Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)

Battery

The following table lists the battery specifications of your Inspiron 3501.

NOTE: Dell recommends that you charge the battery regularly for optimal power consumption. If your battery charge is completely depleted, connect the power adapter, turn on your computer, and then restart your computer to reduce the power consumption.

Table 18. Battery specifications

Description	Values
Battery type	3-cell, 42 Wh "smart" lithium-ion
Battery voltage	11.40 VDC
Battery weight (maximum)	0.20 kg (0.44 lb)
Battery dimensions:	
Height	184.15 mm (7.25 in.)

Table 18. Battery specifications

Description		Values
	Width	89.15 mm (3.51 in.)
	Depth	5.90 mm (0.23 in.)
Temperature range:		
	Operating	0°C to 35°C (32°F to 95°F)
	Storage	-40°C to 65°C (-40°F to 149°F)
Battery operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Battery charging time (approximate)		3 hours (when the computer is off)
<i>i</i> NOTE: Control the charging time, duration, start and end time, and so on, using the Dell Power Manager application. For more information about the Dell Power Manager, see <i>Me and My Dell</i> on www.dell.com .		
Coin-cell battery		CR2032

Display

The following table lists the display specifications of your Inspiron 3501.

Table 19. Display specifications

Description		Option one	Option two	Option three
Display type		High Definition (HD)	Full High Definition (FHD)	Full High Definition (FHD)
Display-panel technology		Twisted Nematic (TN)	Wide-Viewing Angle (WVA)	Wide-Viewing Angle (WVA)
Display-panel dimensions (active area):				
	Height	193.54 mm (7.62 in.)	193.54 mm (7.62 in.)	193.54 mm (7.62 in.)
	Width	344.23 mm (13.55 in.)	344.23 mm (13.55 in.)	344.23 mm (13.55 in.)
	Diagonal	394.90 mm (15.55 in.)	394.90 mm (15.55 in.)	394.90 mm (15.55 in.)
Display-panel native resolution		1366 x 768	1920 x 1080	1920 x 1080
Luminance (typical)		220 nits	220 nits	220 nits
Megapixels		1.05	2.07	2.07
Color gamut		45% (NSTC)	45% (NSTC)	45% (NSTC)
Pixels Per Inch (PPI)		100	141	141
Contrast ratio (typ)		400:1	400:1	400:1
Response time (max)		25 ms	35 ms	35 ms
Refresh rate		60 Hz	60 Hz	60 Hz

Table 19. Display specifications

Description	Option one	Option two	Option three
Horizontal view angle	+/- 40 degrees	+/- 80 degrees	+/- 80 degrees
Vertical view angle	+/- 10 degrees / 30 degrees	+/- 80 degrees	+/- 80 degrees
Pixel pitch	0.25 mm	0.18 mm	0.18 mm
Power consumption (maximum)	4.20 W	4.20 W	4.60 W
Anti-glare vs glossy finish	Anti-glare	Anti-glare	Anti-glare
Touch options	No	No	Yes

Fingerprint reader (optional)

The following table lists the specifications of the optional fingerprint-reader of your Inspiron 3501.

Table 20. Fingerprint reader specifications

Description	Values
Fingerprint-reader sensor technology	Capacitive
Fingerprint-reader sensor resolution	500 dpi
Fingerprint-reader sensor pixel size	64 x 80

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Inspiron 3501.

Table 21. GPU—Integrated

Controller	Memory size	Processor
Intel UHD Graphics	Shared system memory	<ul style="list-style-type: none"> 10th Generation Intel Core i3 11th Generation Intel Core i3 Intel Pentium Gold/Celeron
Intel Iris Xe Graphics	Shared system memory	11 th Generation Intel Core i5/i7

GPU—Discrete

The following table lists the specifications of the discrete Graphics Processing Unit (GPU) supported by your Inspiron 3501.

Table 22. GPU—Discrete

Controller	Memory size	Memory type
NVIDIA GeForce MX330	2 GB	GDDR5

Operating and storage environment

This table lists the operating and storage specifications of your Inspiron 3501.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 23. Computer environment

Description	Operating	Storage
Temperature range	0°C to 40°C (32°F to 104°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	50% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	140 G†	160 G†
Altitude range	0 m to 3,048 m (0 ft to 10,000 ft)	0 m to 10,668 m (0 ft to 35,000 ft)

* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse when the hard drive is in use.

Keyboard shortcuts

NOTE: Keyboard characters may differ depending on the keyboard language configuration. Keys used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol shown on the upper part of the key is typed out. For example, if you press **2**, **2** is typed out; if you press **Shift + 2**, **@** is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multi-media control, as indicated by the icon at the bottom of the key. Press the function key to invoke the task represented by the icon. For example, pressing F1 mutes the audio (refer to the table below).

However, if the function keys F1-F12 are needed for specific software applications, multi-media functionality can be disabled by pressing **fn + Esc**. Subsequently, multi-media control can be invoked by pressing **fn** and the respective function key. For example, mute audio by pressing **fn + F1**.

NOTE: You can also define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in BIOS setup program.

Table 24. List of keyboard shortcuts


































Function key	Redefined key (for multimedia control)	Behavior
	 + 	Mute audio
	 + 	Decrease volume
	 + 	Increase volume
	 + 	Play/Pause
	 + 	Toggle keyboard backlight (optional) NOTE: Non-backlight keyboards have F5 function key without the backlight icon and does not support toggle keyboard backlight function.
	 + 	Decrease brightness

Table 24. List of keyboard shortcuts

Function key	Redefined key (for multimedia control)	Behavior
	 + 	Increase brightness
	 + 	Switch to external display
	 + 	Print screen
	 + 	Home
	 + 	End

The **fn** key is also used with selected keys on the keyboard to invoke other secondary functions.

Table 25. List of keyboard shortcuts





















Function key	Behavior
 + 	Pause/Break
 + 	Toggle scroll lock
 + 	System request
 + 	Open application menu
 + 	Toggle fn-key lock
 + 	Turn on/off wireless connection
 + 	Emoji

Table 25. List of keyboard shortcuts



Function key	Behavior
 + 	Turn on/off Ultra performance mode
 + 	Page up
 + 	Page down

Getting help and contacting Dell

Self-help resources


You can get information and help on Dell products and services using these self-help resources:


Table 26. Self-help resources

Self-help resources	Resource location
Information about Dell products and services	www.dell.com
My Dell	
Tips	
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	www.dell.com/support/windows www.dell.com/support/linux
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals and documents.	Your Dell computer is uniquely identified by a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at www.dell.com/support . For more information on how to find the Service Tag for your computer, see Locate the Service Tag on your computer .
Dell knowledge base articles for a variety of computer concerns	<ol style="list-style-type: none"> 1. Go to www.dell.com/support. 2. On the menu bar at the top of the Support page, select Support > Knowledge Base. 3. In the Search field on the Knowledge Base page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see www.dell.com/contactdell.

 **NOTE:** Availability varies by country/region and product, and some services may not be available in your country/region.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.