

BlueStone

Model
ICB-6729

Hướng dẫn sử dụng Bếp từ



Công suất mạnh lên đến 2000W giúp nấu nhanh và tiết kiệm điện năng

Kiểu dáng sang trọng. Thiết kế siêu mỏng với độ dày bếp chỉ 3cm

Mặt bếp bằng kính Ceramic cao cấp loại A, chịu nhiệt và chịu lực cao

Hãy giữ lại Hướng Dẫn Sử Dụng
vì sự an toàn của bạn

CB

- Các sản phẩm và các linh kiện sản phẩm BlueStone đều được sản xuất dựa trên quy trình chuyên nghiệp theo tiêu chuẩn CB về chất lượng và an toàn sản phẩm.
- Bên cạnh đó, các sản phẩm BlueStone đều được kiểm tra chặt chẽ về mẫu mã, dây chuyền sản xuất và kiểm định lô hàng.
- Sản phẩm BlueStone được công ty đối tác Mỹ Great American Appliance (GAA Corp) tư vấn về quản lý và quy trình. GAA là công ty được thành lập và hoạt động theo luật pháp Mỹ theo Giấy chứng nhận thành lập số 3089043 do văn phòng thư ký bang California cấp có trụ sở chính tại 7809 Michigan Ave Oakland, CA 94605, Hoa Kỳ.
- Sản phẩm BlueStone được thiết kế theo kiểu dáng công nghiệp với màu sắc đa dạng. Dưới sự nghiên cứu và thiết kế của các chuyên viên thiết kế và kỹ thuật viên chuyên nghiệp, các sản phẩm Blue-Stone được thiết kế theo tiêu chuẩn quốc tế nghiêm ngặt nhằm đáp ứng được nhu cầu ngày càng cao của người tiêu dùng.
- BlueStone luôn coi trọng việc chăm sóc khách hàng. Các sản phẩm BlueStone đều được bảo hành 2 năm.

MỤC LỤC

CẢNH BÁO AN TOÀN	04
ĐẶC TÍNH KỸ THUẬT	04
MÔ TẢ TỔNG QUÁT	06
HƯỚNG DẪN SỬ DỤNG	07
CÁC LOẠI NỒI PHÙ HỢP	08
CÁCH VỆ SINH VÀ BẢO TRÌ	09
SỰ CỐ VÀ CÁCH KHẮC PHỤC	10
HÃY BẢO VỆ MÔI TRƯỜNG CỦA BẠN	11

CONTENTS

SAFETY CAUTIONS	15
SPECIFICATION	16
GENERAL DESCRIPTION	17
INSTRUCTION FOR USE	18
APPLICABLE VESSEL	19
CLEANING AND MAINTENANCE	20
TROUBLE SHOOTING	21
ENVIRONMENT FRIENDLY DISPOSAL	22

Tiêu chuẩn kỹ thuật nhà sản xuất có thể thay đổi mà không cần báo trước.

Manufacturer has right to replace technical standard or specification without any notice.

CẢNH BÁO AN TOÀN

Hãy đọc kỹ các hướng dẫn sử dụng trước khi lắp ráp, vận hành và lưu giữ hướng dẫn này cho để tham khảo về sau.

Khi sử dụng thiết bị điện, cần tuân thủ các chú ý an toàn trước khi sử dụng nhằm tránh các rủi ro cháy nổ, điện giật hoặc bị thương như sau:

1. Không để bếp trong môi trường nhiệt độ quá cao. Ví dụ để bên cạnh bếp ga hoặc bếp dầu.
2. Đặt bếp trên bề mặt phẳng, để cạnh và mặt đáy của bếp cách xa vật thể khác tối thiểu 10cm nhằm tạo không gian để không khí lưu thông thoáng mát vào trong và ra ngoài cho thiết bị.
3. Nếu dây dẫn nguồn bị hỏng thì phải do nhà chế tạo hoặc đại lý dịch vụ hoặc những người có trình độ tương đương thay thế nhằm tránh xảy ra sự cố. Không tự ý sửa chữa, tránh gây tai nạn cho người sử dụng.
4. Vui lòng dùng ổ điện hơn 10A. Không dùng chung ổ điện với thiết bị khác để tránh gây cháy nổ.
5. Không đưa dây sắt hoặc để bất kỳ vật cản nào che đậy các lỗ thoát hơi trong lúc bếp đang hoạt động.
6. Không đặt và vận hành bếp từ trên mặt phẳng bằng kim loại, thảm, khăn trải bàn, tấm giấy mỏng để tránh việc bếp tỏa nhiệt, gây ra nguy hiểm cho người sử dụng và hỏa hoạn.
7. Tuyệt đối không vận hành thiết bị với nồi/chảo rỗng, không có thức ăn bên trong, có thể gây nguy hiểm cho người sử dụng và hỏng hóc cho bếp.
8. Không được đặt bất kỳ vật dụng bằng kim loại nếu đó không phải là nồi hoặc chảo trên mặt kính của bếp trong lúc bếp đang hoạt động.
9. Không được vệ sinh thiết bị bằng nước hay bất kỳ các chất lỏng khác, tránh trường hợp chất lỏng ngấm vào bên trong linh kiện, gây hỏng hóc.
10. Không để các vật liệu dễ bắt lửa tiếp xúc trực tiếp, để gần thân của nồi/chảo và đặc biệt là giữa đáy nồi/chảo và mặt kính của bếp khi đang hoạt động.
11. Luôn rút phích cắm ra khỏi ổ điện sau khi đã sử dụng xong. Khi rút phích cắm, vui lòng cầm nắm ở đầu phích điện để rút ra khỏi ổ. Tuyệt đối không cầm ở phần thân dây để kéo ra khỏi ổ điện, dẫn đến hư hỏng cho thiết bị và nguy cơ giật điện cho người sử dụng.


12. Không để các vật dụng, đặc biệt bằng kim loại như dây sắt, ốc, vít,...lọt vào bên trong thân bếp qua các kẽ hở thoát hơi.
13. Để bếp tránh xa tầm tay của trẻ em. Không được để trẻ em sử dụng bếp.
14. Nếu phát hiện mặt kính của bếp bị nứt, bể, hay có dấu hiệu bị hư tổn bất kỳ nào, lập tức ngưng sử dụng bếp và đem đến trung tâm bảo hành gần nhất để được hỗ trợ.
15. Không được tự ý sửa chữa và thay thế linh kiện trong bếp. Điện áp cao bên trong vỏ thiết bị có thể gây giật điện và nguy hiểm cho người sử dụng.
16. Để bếp tránh xa nơi ẩm ướt và nguồn nhiệt khi đang sử dụng.
17. Không được di chuyển bếp khi còn để nổi ở phía trên.
18. Không chạm vào bề mặt bếp hay lau chùi ngay sau khi sử dụng bếp xong vì mặt bếp sẽ vẫn còn nóng.
19. Cất giữ bếp ở nơi khô ráo, sạch sẽ và thoáng mát, tránh nơi ẩm mốc và nơi nhiều côn trùng, có thể chui vào bên trong bếp.
20. Với người có tiền sử về bệnh tim mạch, xin vui lòng tham khảo ý kiến bác sĩ trước khi sử dụng.
21. Thiết bị này không thích hợp để sử dụng bởi người tàn tật, thiếu năng trí tuệ, hoặc những người không có kinh nghiệm và thiếu hiểu biết (kể cả trẻ em) trừ khi được giám sát hoặc hướng dẫn sử dụng thiết bị bởi người có trách nhiệm về sự an toàn của họ.

ĐẶC TÍNH KỸ THUẬT


Model	Hiệu điện thế	Công suất (W)	Kích thước sản phẩm (mm)	Trọng lượng (kg)
ICB-6729	220-240V~50-60Hz	2000W	300 x 380 mm	3.87kg

MÔ TẢ TỔNG QUÁT

► **Model: ICB-6729**

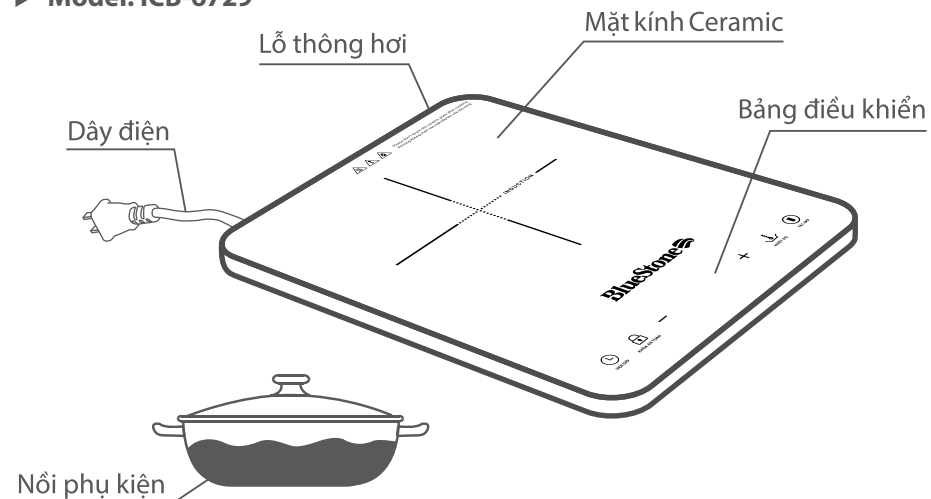

BẢNG ĐIỀU KHIỂN

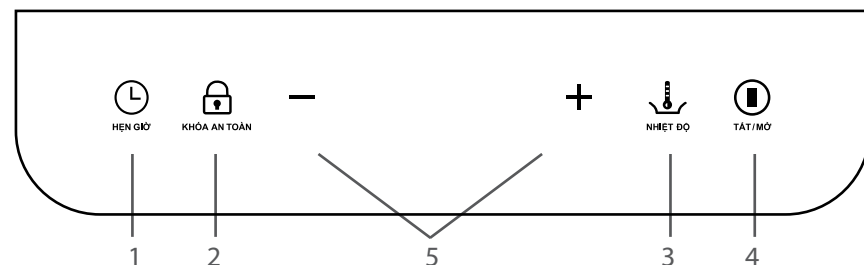

1	Hẹn giờ
2	Khóa an toàn
3	Nhiệt độ
4	Tắt/ Mở
5	Tăng giảm nhiệt độ

HƯỚNG DẪN SỬ DỤNG

1 CHÚ Ý TRƯỚC KHI SỬ DỤNG

- Đặt nồi với thức ăn ngay giữa mặt kính bếp.
- Cắm dây điện vào ổ cắm phù hợp để dây điện tiếp xúc tốt với ổ cắm.

Ghi Chú:

- Lau bên ngoài nồi sạch sẽ trước khi đặt lên bếp.
- Không đặt nồi rỗng lên bếp để tránh hư nồi hay nguy hiểm gây cháy.



2 HƯỚNG DẪN TẮT/MỞ THIẾT BỊ

- Đặt nồi lên giữa mặt bếp.
- Cắm điện, bếp sẽ phát ra tiếng "bíp", bếp ở trạng thái sẵn sàng.
- Chạm biểu tượng "Tắt/Mở" sau đó chọn chương trình nấu tương ứng.
- Sau khi nấu, chạm biểu tượng "Tắt/Mở" để tắt bếp, quạt giải nhiệt trong bếp vẫn tiếp tục hoạt động trong vòng 1 phút.
- Sau khi quạt ngừng, rút phích cắm ra khỏi ổ điện.

3 HƯỚNG DẪN ĐIỀU CHỈNH MỨC CÔNG SUẤT/NHIỆT ĐỘ

- Sau khi cắm điện, màn hình sẽ nhấp nháy, điều đó có nghĩa là bếp đã được kết nối điện.
- Chạm biểu tượng "Tắt/ Mở", màn hình sẽ hiển thị "----", điều đó có nghĩa là bếp đã sẵn sàng hoạt động.
- Đặt nồi lên chính giữa bếp và chọn nhiệt độ/công suất thích hợp bằng cách chạm biểu tượng "Nhiệt độ". Khi chạm biểu tượng này, màn hình sẽ hiển thị 200°C, chạm biểu tượng "+/-" để điều chỉnh nhiệt độ từ 60°C đến 270°C. Chạm biểu tượng "Nhiệt độ" thêm một lần nữa để biết mức công suất. Công suất có thể điều chỉnh từ 100-2000W.
 - Có 8 mức công suất khác nhau: (P1:100W, P2:500W, P3: 800W, P4: 1000W, P5: 1300W, P6: 1600W, P7: 1800W, P8: 2000W).
 - Có 8 mức nhiệt độ khác nhau (60°C, 100°C, 130°C, 160°C, 180°C, 210°C, 240°C, 270°C).

HẸN GIỜ

- Chọn chức năng hẹn giờ, thời gian mặc định là 2 giờ, màn hình hiển thị “2:00”. Chọn nút +/- để tăng/giảm thời gian. Thời gian sẽ được đếm (trừ) ngược lại.
- Thời gian có thể cài đặt tối đa là 3 giờ.
- Khi gần kết thúc thời gian hẹn giờ, màn hình hiển thị sẽ nhấp nháy. Khi hết thời gian hẹn giờ, bếp sẽ phát ra tiếng “bíp” và tự động tắt bếp.

Mẹo: Khi muốn tăng/giảm nhiều thời gian hẹn giờ, chỉ cần ấn và giữ nút “+/-”, bộ hẹn giờ sẽ tăng/giảm 10 phút.

Lưu ý: Bạn có thể hủy hẹn giờ trong thời gian nấu bất cứ lúc nào bằng cách nhấn lại nút hẹn giờ

KHÓA AN TOÀN.

Chạm và giữ biểu tượng “**Khóa an toàn**” trong vòng 3 giây. Sau 3 giây, tất cả các phím đều sẽ bị khóa lại trừ nút “**TẮT/ MỞ**” để tránh thao tác xấu. Chạm và giữ biểu tượng này một lần nữa. Sau khi âm thanh phát ra, trạng thái khóa sẽ bị hủy bỏ.

4 CHỨC NĂNG BẢO VỆ

1. Bảo vệ điện áp thấp hoặc bị quá tải.
Khi điện áp thấp hoặc bị quá tải, bếp sẽ tự động điều chỉnh điện áp và giảm công suất. Bên cạnh đó, xin lưu ý rằng bếp từ sẽ không hoạt động khi điện áp thấp hơn 85V và cao hơn 250V.
2. Bảo vệ khi tiếp xúc đồ kim loại nhỏ
Bếp từ sẽ không hoạt động nếu những vật dụng kim loại nhỏ (có đường kính dưới 8cm) đặt trên mặt bếp để ngăn chặn hư hại do quá nhiệt.
3. Không có nồi đặt trên bếp.
Bếp sẽ không hoạt động khi không có nồi hoặc đặt nồi sai cách hoặc nồi có chất liệu không phù hợp. Khi đó, bếp sẽ phát ra âm thanh để cảnh báo. Xin lưu ý rằng, bếp sẽ không hoạt động cho đến khi đặt nồi đúng cách.
4. Nếu nhiệt độ quá cao, bếp sẽ ngừng hoạt động và phát ra âm thanh cảnh báo cho đến khi nhiệt độ trở lại bình thường.

1 CHẤT LIỆU NỒI:

- Chất liệu nồi: Nồi/chảo bằng thép, sắt tráng men, thép không gỉ với đáy nồi/chảo phẳng, đường kính đáy từ 12cm đến 26cm.
- Đề nghị sử dụng nồi phụ kiện đi kèm theo bếp hoặc nồi đúng chất liệu nêu trên thay vì sử dụng các loại nồi khác.

2 SỬ DỤNG NỒI THEO YÊU CẦU BÊN DƯỚI:

- Trọng lượng: trọng lượng nồi bao gồm thức ăn và nước bên trong phải nhỏ hơn 15kg.
- Nồi/chảo phải phù hợp sử dụng cho bếp từ.
- Nồi/chảo khi mua phải thử trước để kiểm tra xem có hiện tượng không bình thường hay không.
- Nồi/chảo khi mua phải có đáy phẳng và đi kèm với nắp có lỗ thoát hơi.



Ghi Chú:

Để đảm bảo an toàn, bạn cần phải đổ nước đầy nồi và nấu sôi để loại bỏ tạp chất trước khi sử dụng lần đầu tiên.

CÁCH VỆ SINH VÀ BẢO TRÌ

1. Tắt điện trước khi vệ sinh bếp. Không lau bếp cho đến khi mặt bếp nguội hẳn.
2. Vệ sinh mặt kính, bảng điều khiển và vỏ ngoài của bếp:
 - Dùng vải mềm cho các vết bẩn nhẹ.
 - Với vết dầu mỡ, bụi, vết mực thì sử dụng vải ẩm với xà bông có chất tẩy nhẹ.
3. Khi quạt đang hoạt động, bụi và chất dơ sẽ bám vào trong lỗ thông hơi, vui lòng vệ sinh bằng bàn chải mềm hay tăm bông cotton thường xuyên.
4. Không vệ sinh bếp bằng cách nhúng trực tiếp vào nước hay chất lỏng khác để tránh nguy hiểm.
5. Để an toàn cho bếp, phải đảm bảo phích cắm tiếp xúc tốt với ổ cắm điện.
6. Không giật dây điện ra khi bếp đang hoạt động. Để tăng tuổi thọ của bếp, nên tắt bếp bằng cách nhấn nút “TẮT/MỞ” trước, sau đó mới rút điện ra.
7. Không nên rút điện ra ngay sau khi nấu xong, vì sau khi tắt bếp, quạt vẫn hoạt động để làm nguội bếp.
8. Vui lòng rút dây điện ra và cất bếp vào nơi khô ráo khi không sử dụng trong một thời gian dài.

SỰ CỐ VÀ CÁCH KHẮC PHỤC

Các trường hợp như bên dưới không có nghĩa là sản phẩm bị hư, vui lòng tự kiểm tra trước khi mang sản phẩm đi sửa chữa.

BIỂU THỊ LỖI	SỰ CỐ	CÁCH KIỂM TRA
	Không có nồi hoặc nồi không thích hợp dung cho bếp từ, có tiếng “bíp” sẽ phát ra cứ 2.5 giây, sau 60 giây bếp sẽ tự động tắt.	Chọn và đặt nồi thích hợp và khởi động lại bếp.
E0	Điện áp quá thấp	Thiết bị sẽ hoạt động bình thường khi điện áp ổn định.
E1	Điện áp quá cao	Thiết bị sẽ hoạt động bình thường khi điện áp ổn định.
E2	Nồi quá nóng	Hãy để nguội và thử lại.
E3	IGBT quá nóng	Hãy để nguội và thử lại.
E5	Bộ cảm biến nhiệt của bếp từ ngắn mạch hoặc hở mạch	Liên hệ với các trạm bảo hành gần nhất để sửa chữa
E6	Bộ cảm biến nhiệt của IGBT ngắn mạch hoặc hở mạch	Liên hệ với các trạm bảo hành gần nhất để sửa chữa
E9	Bộ cảm biến nhiệt của bếp từ bị hư hỏng	Liên hệ với các trạm bảo hành gần nhất để sửa chữa

Nếu bếp vẫn không hoạt động sau khi tự kiểm tra, phải ngay lập tức liên hệ với các trạm bảo hành gần nhất. Không tự ý tháo lắp sản phẩm, nếu không chúng tôi không chịu trách nhiệm bảo hành.


KHÔNG TỰ Ý SỬA CHỮA THIẾT BỊ

HÃY BẢO VỆ MÔI TRƯỜNG CỦA BẠN!



Hãy bảo vệ môi trường của bạn!
Tôn trọng quy định của địa phương: hãy đem những thiết bị điện không sử dụng nữa đến những nơi thu gom phù hợp để tái chế.

User manual Induction Cooker

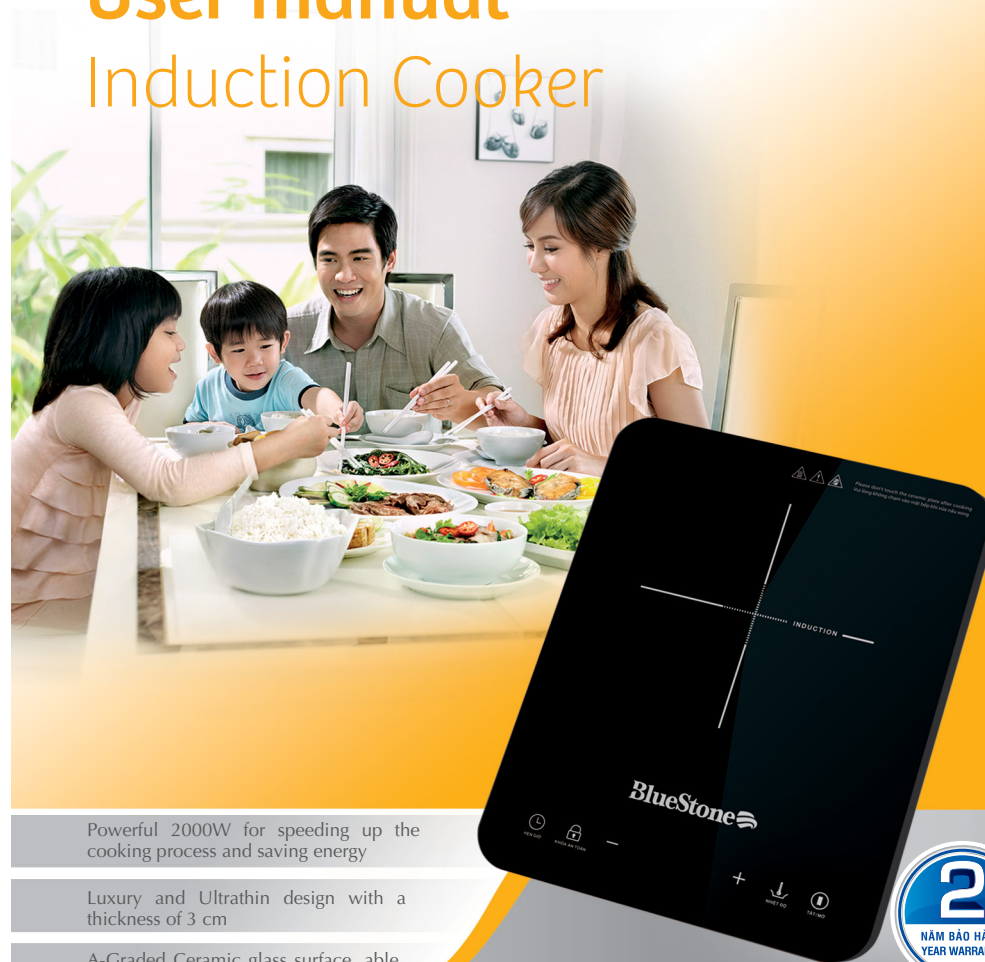

Powerful 2000W for speeding up the cooking process and saving energy

Luxury and Ultrathin design with a thickness of 3 cm

A-Graded Ceramic glass surface, able to withstand high force and heat



Always keep manual for your safety

CB

• Standard Compliance

BlueStone products are manufactured under the Standards and the technical rules for product safety design and testing.

BlueStone products and associated accessories intended for professional, industrial process under CB Standards and have been successfully tested on areas: sampling test, assembling test and lot test.

• Trademark

BlueStone manufactured products are based on the consultation by Great American Appliance (GAA Corp) a company incorporated and existing under the laws of United States of America under Certificate of Incorporation No. 3089043 in the secretary office located in the state of California in Michigan, Ave Oakland, CA 94605, USA.

• Industrial design

Bluestone provides products with industrial design and color variations offering a broad range of possibilities for customers. Through the experienced designers and technicians, Bluestone design has highly reliable solutions so the customers are assured of quality designed systems that meet stringent industry and international compliance regulations.

• After sales service

After sales service is considered by BlueStone as a major concern for our customers. With such, we provide our BlueStone products with a 2 years guaranteed warranty that help our end user feel at ease.

SAFETY CAUTIONS

Please read and understand this entire manual before attempting to assemble, operate or install the product. Make sure to keep this manual in a convenient place to reach for reference later.

When using electrical appliances, basic precaution should always be followed to reduce the risk of fire, electric shock, and injury to persons, including the following:

1. Do not use the unit under high temperature environment, for example, do not use the unit besides the gas and oil stove.
2. Put the unit on the flat surface, please keep the side and back of the unit more than 10cm away from other objects.
3. If the power cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified person in order to avoid hazard. Do not attempt to disassemble or repair the unit by yourself.
4. Power outlet for this unit should be measure above 10A. To avoid fire hazard please do not use the same outlet with other appliance.
5. Always make sure the ventilation holes are at all times, free of obstruction while the unit is operational.
6. Do not put and operate the unit on metal surface, carpet, table cloth & other flammable object to avoid heat radiation from the unit that could potentially cause fire hazard.
7. Do not operate the unit while the cooking pot/frying pan is empty. Attempting to do so will damage the unit as well as causing injury to the user.
8. Do not place any metal with magnetic trait on top of the unit's cooking surface other than induction cookware while the unit is operational.
9. Do not soak or rinse in water or any other types of liquid to avoid damage to the internal components of the unit.
10. Do not place flammable material/object directly touching the outer surface of the pot/frying pan, especially between the bottom side & the unit's cooking surface while cooking.
11. Always remember to unplug after use. While unplugging the power cord from the outlet, please hold firmly onto the plug and gently pull away from the electrical outlet. Under no circumstances should you unplug by pulling on the cord, damaging the cable and can potentially cause electrical shock.


- 12. Do not allow any small object, especially metals like iron wire, screw,etc to fall inside the unit's body through the ventilation holes.
- 13. Keep the unit away from children's reach. Make sure that children are not in a position to use the unit.
- 14. Under circumstances that the ceramic surface is found to be cracked or damaged, immediately stop using the unit and bring it to the closest warranty center for repair.
- 15. Do not attempt to repair or disassemble the unit by yourself. High voltage found within the unit can potentially cause electric shock to the user.
- 16. Keep the unit away from wet places or near a heat source while operational.
- 17. Do not move the unit while the cooking pot/frying pan is still on top/during use.
- 18. Do not touch the ceramic surface on top of the cooking zone or immediately clean with damp cloth right after using.
- 19. Store the unit away in a clean & dry place, avoiding moist area where insect can potentially damage the unit if they enter inside through the ventilation holes.
- 20. If the operator is installed with cardiac pacemaker, please follow the doctor's advice before using.
- 21. For users with a heart condition, kindly seek for doctor advice before using the unit.
- 22. The appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

SPECIFICATION


Model	Voltage	Power (W)	Product Dimension (mm)	Weight (kg)
ICB-6729	220-240V~50-60Hz	2000W	300 x 380 mm	3.87kg

GENERAL DESCRIPTION

► Model: ICB-6729

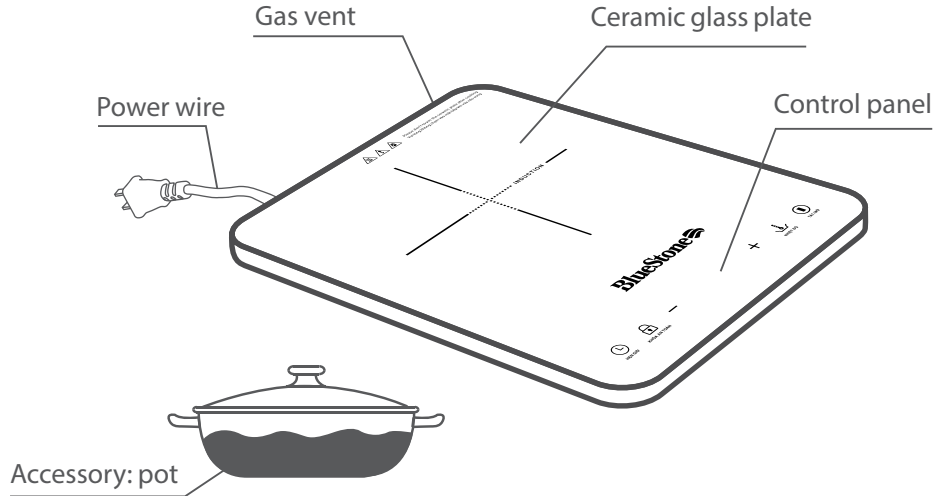

CONTROL PANEL

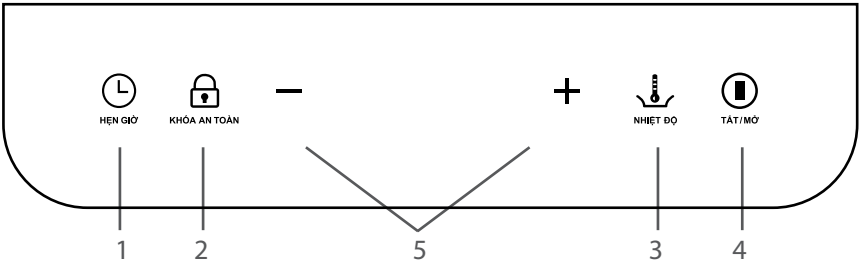

1	Timer Button
2	Child Lock
3	(Power/Temperature)
4	On/Off Button
5	Up/Down Temperature


INSTRUCTION FOR USE

1 ATTENTION BEFORE USING

- Place the pan with food on the center of crystal glass plate.
- Plug in a suitable socket and get good contact.

Notes:

- Clean the water, oil or other dirt on the pan before placing it on the unit.
- Please do not place an empty pot on the unit to avoid the pot getting damaged or the danger of fire.

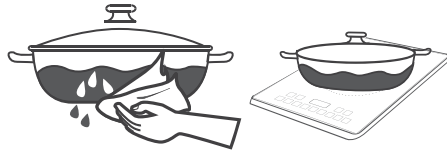**2 ON/OFF OPERATION INSTRUCTION**

- Place the pot at the center of the glass plate
- Plug in, the buzzer will sound and it enters the waiting mode.
- Touch the icon **"Tắt/Mở"**, then choose the function key.
- After cooking, touch the icon **"Tắt/Mở"** to turn off, the fan automatic delay heat for a minute.
- Unplug the induction cooker once the fan stops working.

3 FUNCTION SELECTION INSTRUCTION

- After connected with power, The cooker digital display is Flashing , It's mean the cooker have connected with the power..
- Touch the key of **"Tắt/Mở"** button, the digital display show is **"----**", It's mean cooker ready to work. At the same time with the sound.
- Put the hollow ware (food and water) on the center of induction cooker panel. Choose and of function according to cooking need

There are 8 power levels (P1:100W, P2:500W, P3: 800W, P4: 1000W, P5: 1300W, P6: 1600W, P7: 1800W, P8: 2000W).

There are total 8 temperature levels(60°C, 100°C, 130°C, 160°C, 180°C, 210°C, 240°C, 270°C).

TIMER

- After touch the key of **"Hẹn giờ"**, the default time is 2 hours, the display will show **"2:00"**. According to cooking need adjust the time by press the button of **"+"** or **"-"**. One short time touch will increase or decrease 1 minute. Long time touch will increase or decrease 10 minutes by key-touch on **"+"** or **"-"**. After set the time, it will decrease with count down. The induction cooker will automatically turn off when it is shown **"OFF"**.

MAX POWER

- Max power function. If you wish to make the cookware's temperature increase faster for cooking, press the Max Power Button. The indicator above this button will light and cooktop will start the maximum power level for heating. The display window shows the power level **"P9"**.

Notice:

You can cancel timer setting while cooking by press **"Hẹn giờ"** again.

SAFE LOCK :

- During the induction cooker is working, touch the **"Khóa An Toàn"** key to lock the working state, under this condition, all the keys are no able to operate except the **"Tắt/Mở"** key, Long hold touch this key for unlock

4 PROTECTION FUNCTION**1. Low voltage protection, overload protection**

When voltage is low or overload, it can automatic adjust voltage and reduce power output. Besides, the induction cooker won't work when the voltage is low to 85V and overload 250V.

2. Protection to small metal ironwork.

There is no power output during the small metal ironwork (the diameter is less than 8 cm) are on the surface of panel, in order to prevent improper over heat.

3. No hollow ware protection

The induction cooker won't work when there is no hollow ware or out of way to placed hollow ware or the material of hollow ware is irrelevancy. Not only for that, has it also come up with to sound to warning. The induction cooker won't work until placed hollow ware with the right way.

- 4. If the temperature is too high, the induction cooker will stop output power and also come up with the sound to warn, until the temperature come back normalization.

APPLICABLE VESSEL

1 MATERIAL REQUIRED

- Steel, enameled iron, stainless steel, flat-bottom pans/pots with bottom diameter from 12cm to 26cm.
- So suggest to use the required pot, do not try to use other pot instead (especially pressure sensors vessels).

2 PLEASE KINDLY ACCORDING TO THE BELOW REQUIREMENT

- Weight requirements: the pot (including the food and water inside) is less than 15kg.
- Pan/pot must be suitable for induction cooker.
- Pan/pot should be tried out if it's bought by yourself to see if there are unusual phenomena.
- Pan/pot bought by yourself should be flat and come with the cover with gas vent.



***Noted:**

For safety, you must pour water full of pot and boil to reject impurities before first use.

CLEANING AND MAINTENANCE

1. Remove the power plug prior to cleaning the unit. Do not clean it until the cooking surface has completely cool down.
2. To clean the ceramic surface, control panel and the outer layer of the unit
 - * Use soft cloth to wipe away slight stain.
 - * Use a damp cloth with light detergent for grease, dirt or ink blot.
3. While the radiator fan working, dust and dirt would remain on the gas vent, please clean it by brush or cotton stick regularly.
4. Remember do not wash the unit by water directly to avoid damaging.
5. To protect induction cooker, be sure to have a good contact between plug and socket before using.
6. Do not pull out the power cord directly during operation. To extend the appliance's using life, press "TẮT/MỞ" button first, then pull out the power cord.
7. The fan would still working for cooling the plate. In order to make operating time longer, it is better to plug out after the fan stops working.
8. Please pull out the power cord and put it away when not used for a long time.

TROUBLE SHOOTING

The cases below do not mean the unit breaks down, please kindly check by yourself before sending to repair.

FAULT DISPLAY	POSSIBLE REASON	SOLUTION
	Without pot or not the suitable pot, sound s"beep" in every 2.5 seconds, the induction cooker will be off automatically after 50 seconds.	Put a suitable pot and restart the induction cooker.
E0	Un-normal voltage supply : voltage too low	It will be fine when the voltage become normal
E1	Un-normal voltage supply: Voltage too high	It will be fine when the voltage become fine
E2	The Cookware overheats	Let it cool and try again
E3	IGBT overheats	Let it cool and try again
E5	The sensor for cookware is short-circuited/open	Please go to the authorized service center for maintenance
E6	The sensor for IGBT is short-circuited/open	Please go to the authorized service center for maintenance
E9	The sensor for cookware is failures	Please go to the authorized service center for maintenance

If it is still not working after the inspection by yourself, please immediately contact our service points, do not apart the unit by yourself or our company is out of responsibility.

Be sure to use the power cord recommended by the appliance manufacturer after it is damaged.

DO NOT TRY TO ADJUST OR REPAIR THIS APPLIANCE BY YOURSELF

ENVIRONMENT FRIENDLY DISPOSAL



You can help protect the environment!

Please remember to respect the local regulations: hand in the non-working electrical equipments to an appropriate waste disposal center.

