

User's Guide 5382/5465/5508

ENGLISH

Congratulations upon your selection of this CASIO watch.

Important!

- This manual provides a brief overview of your watch.

For a full Operation Guide and Q&A information about this product, go to the website below.
<http://world.casio.com/manual/wat/>




E

E-1

About This Manual


- The operational procedures for Modules 5382, 5465 and 5508 are identical. All of the illustrations in this manual show Module 5382.

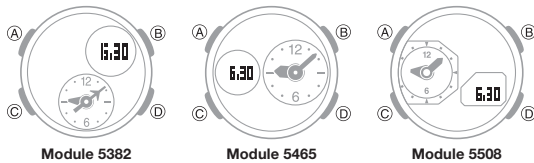

E-2

E-3

2. Press (C) to move the flashing in the sequence shown below to select a setting.

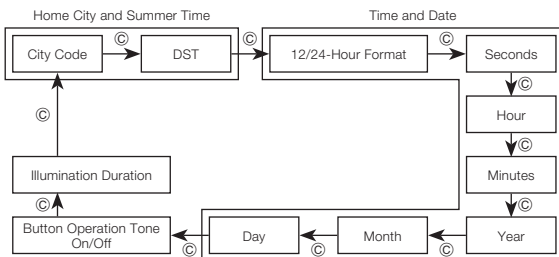

E-4

Configuring Home City, Time and Date Settings

- Configure Home City and summer time settings first. After that, configure time and date settings.

1. In the Timekeeping Mode, hold down (A) until ADJ appears.
 - This indicates the city code setting mode.

3. Use (D) and (B) to change the selected setting.


| Screen | To do this: | Do this: |
|--------|--|--------------------------------|
| TYO | Change the city code | Use (D) (East) and (B) (West). |
| OFF | Toggle between Daylight Saving Time (ON) and Standard Time (OFF) | Press (D). |
| 12H | Toggle between 12-hour (12H) and 24-hour (24H) timekeeping | Press (D). |
| 36 | Reset the seconds to 00 | Press (D). |
| 10:08 | Change the hour or minute | Use (D) (+) and (B) (-). |
| 2016 | Change the year | Use (D) (+) and (B) (-). |
| 6.30 | Change the month or day | Use (D) (+) and (B) (-). |

4. Press (A) to exit the setting mode.

E-5

Mode Selection and Operations

- Press (C) to change the mode.
- To return to the Timekeeping Mode from any other mode, hold down (C) for about two seconds.

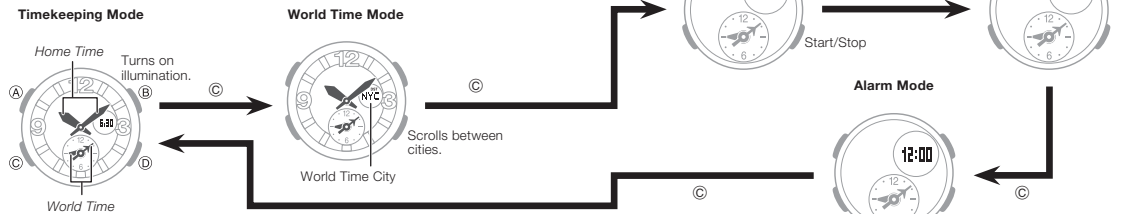

E-6

E-7

Misaligned Hands

The analog hands may become misaligned as described below if the watch is exposed to strong magnetism, impact, or other abnormal conditions.
 • Analog time and digital time are different from each other
 If this happens, refer to "Hand Home Position Adjustment" in the Operation Guide available at the CASIO website and adjust the hand alignment.

E-8

Specifications

- Accuracy at normal temperature:** ±30 seconds a month
- Digital Timekeeping:** Hour, minutes, seconds, p.m. (P), month, day, day of the week
- Time format: 12-hour and 24-hour
- Calendar system: Full Auto-calendar pre-programmed from the year 2000 to 2099
- Other: Home City code (can be assigned one of 48 city codes); Standard Time/Daylight Saving Time (summer time)
- Analog Timekeeping:** Hour, minutes (hand moves every 20 seconds)
- World Time:** 48 cities (31 time zones)
Other: Daylight Saving Time/Standard Time
Home City/World Time City swapping
- Stopwatch:**
Measuring unit: 1 second
Measuring capacity: 59'59"
Measuring modes: Elapsed time, split time, two finishes

E-9

Countdown Timer:

Measuring unit: 1 second
 Countdown range: 60 minutes
 Countdown start time setting range: 1 to 60 minutes (1-minute increments)

Alarms: Daily alarm; Hourly time signal

Illumination: LED (light-emitting diode); Selectable illumination duration (approximately 1.5 seconds or 3 seconds)

Other: Button operation tone on/off; Moving the Hands to View the Digital Display

Power Supply: Two silver oxide batteries (Type: SR726W)

Approximate battery operating time: 2 years under the following conditions:

- 1 illumination operation (1.5 seconds) per day
- Alarm: 10 seconds/day

Frequent use of illumination runs down the battery.

Specifications are subject to change without notice.



City Code Table

L-1

E-10

City Code Table

| City Code | City name | UTC Offset/ GMT Differential | City Code | City name | UTC Offset/ GMT Differential |
|-----------|----------------|---------------------------------|-----------|-----------|---------------------------------|
| PPG | PAGO PAGO | -11 | RAI | PRAIA | -1 |
| HNL | HONOLULU | -10 | UTC | | |
| ANC | ANCHORAGE | -9 | LIS | LISBON | 0 |
| YVR | VANCOUVER | -8 | LON | LONDON | |
| LAX | LOS ANGELES | -8 | MAD | MADRID | |
| YEA | EDMONTON | -7 | PAR | PARIS | |
| DEN | DENVER | -7 | ROM | ROME | +1 |
| MEX | MEXICO CITY | -6 | BER | BERLIN | |
| CHI | CHICAGO | -6 | STO | STOCKHOLM | |
| NYC | NEW YORK | -5 | ATH | ATHENS | |
| SCL | SANTIAGO | -4 | CAI | CAIRO | +2 |
| YHZ | HALIFAX | -4 | JRS | JERUSALEM | |
| YYT | ST. JOHN'S | -3.5 | MOW | MOSCOW | +3 |
| RIO | RIO DE JANEIRO | -3 | JED | JEDDAH | +3 |
| FEN | F. DE NORONHA | -2 | THR | TEHRAN | +3.5 |

L-2

| City Code | City name | UTC Offset/ GMT Differential |
|-----------|-----------|---------------------------------|
| DXB | DUBAI | +4 |
| KBL | KABUL | +4.5 |
| KHI | KARACHI | +5 |
| DEL | DELHI | +5.5 |
| KTM | KATHMANDU | +5.75 |
| DAC | DHAKA | +6 |
| RGN | YANGON | +6.5 |
| BKK | BANGKOK | +7 |
| SIN | SINGAPORE | |
| HKG | HONG KONG | +8 |
| BJS | BEIJING | |
| TPE | TAIPEI | |
| SEL | SEOUL | +9 |
| TYO | TOKYO | +9 |
| ADL | ADELAIDE | +9.5 |
| GUM | GUAM | +10 |
| SYD | SYDNEY | +10 |

| City Code | City name | UTC Offset/ GMT Differential |
|-----------|------------|---------------------------------|
| NOU | NOUMEA | +11 |
| WLG | WELLINGTON | +12 |

- This table shows the city codes of this watch (As of January 2016).
- The rules governing global times (UTC offset and GMT differential) and summer time are determined by each individual country.

L-3