



OWNER'S MANUAL

LG TONE Free

Bluetooth® LG Stereo Headset

ENGLISH

TIẾNG VIỆT

✓ **NOTE:** For the best performance and to prevent any damage to, or misuse of the headset, please read all of the information carefully prior to using the headset.

Any modifications or changes to this manual due to typographical errors or inaccuracies of stated information shall only be made by LG Electronics Inc.

Rev 1.0 VN



Google Play



App Store

TONE-FP8 / TONE-FP8W
TONE-FP8E

www.lg.com

Copyright © 2021 LG Electronics Inc. All Rights Reserved

Contents

Safety Precautions	1
HD Speaker	3
Product Components	4
Overview	5
Pairing and Connecting	6
Wearing Earbuds	7
Playing Music	8
Mobile Calling Functions	9
Listen to the Ambient Sound (LAS) / Active Noise Cancellation (ANC)	10
UVnano	11
Charging	12
Checking the Battery Status	13
Battery Status Indicator	14
Out of Range	15
LG TONE Free App	15
Troubleshooting	16
Specifications and Features	17
Declaration of Confirmation	18
Additional Information	19
Limited Warranty	22
Important Safety Information	23
Open Source Software Notice Information	24
Symbols	25

The LG TONE Free (TONE-FP8) is a lightweight wireless headset that uses *Bluetooth* technology.

This product can be used as an audio accessory for devices supporting either the A2DP or Hands-Free *Bluetooth* Profile.

Safety Precautions

The following safety precautions are provided to prevent any unexpected accident or damage. Please familiarise yourself with the safety precautions. The safety precautions are classified into "WARNING" and "CAUTION".

 **WARNING:** Failing to comply with the instructions may result in serious injury or death.

 **CAUTION:** Failing to comply with the instructions may result in minor injury or product damage.

WARNING

Do not drop the product from a high place.

Make sure there is no water, alcohol, or benzene in contact with the product.

Do not store the product in a wet or dusty place.

Do not place heavy objects on the product.

This product is waterproof to the IPX4 level (daily life waterproof).

(The IPX4 waterproof rating applies to the earbud product only.)

Do not put the product under the water or use it in a humid location such as a bathroom.

 CAUTION

Do not disassemble, adjust, or repair the product arbitrarily.

Do not place the product near excessive heat or flammable material.

The product may be damaged if an incompatible charger is used.

Make sure that an infant or child does not swallow a magnet or a small component of the product.

Make sure that foreign objects do not enter the charger's connectors (charging port and power plug). Failure to do so may result in fire or electric shock.

If you have a medical device implanted, contact your doctor before using this device.

This product has a built-in battery, and the battery cannot be removed or replaced arbitrarily.

For your safety, do not remove the battery incorporated in the product.

If you arbitrarily replace the battery or don't replace it correctly, it may explode.

The lithium-ion battery is a hazardous component that can cause injury.

Battery replacement by an unqualified professional can cause damage to your device.

Do not discard the battery arbitrarily. Follow the local procedure for discarding batteries.

Risk of fire or explosion if the battery is replaced by an incorrect type.

Do not store or transport at pressures lower than 11.6 kPa and at above 15000 m altitude.

Replacement of a battery with an incorrect type that can defeat a safeguard (for example, in the case of some lithium battery types).

Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.

Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas.

A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.

Do not carelessly throw away old batteries. It can cause an explosion or fire. The disposal method may vary by country and region. Dispose of it in an appropriate manner.

NOTE

If the product is exposed to excessive sweat, clean the product.

Keep the earbuds clean.

Wearing earbuds for a long time may cause pain, and if humidity inside ears continues for a long time, it may cause skin trouble.

HD Speaker

If the communication network of the device you are connecting to supports HD Voice Calling, you can enjoy making voice calls and listening to music in high definition.

Product Components



LG TONE Free™
Earbuds (medium eargels
installed)
UV Charging Case



Extra Ear Gels
(small & large)



USB Type C™ Charging
Cable



Owner's Manual



Warranty Card

✓ **NOTE:** Actual product design may differ from images shown in manual.



CAUTION

Make sure authentic LG Electronics components are used. Using a non-authentic component may damage the product and thus void the warranty. Use the USB Type C™ cable provided with the product.



NOTE


The complete manual is available for download from the LG Electronics website.




www.lg.com > support or service > Manuals & Downloads > Manuals

Overview

Charging Case

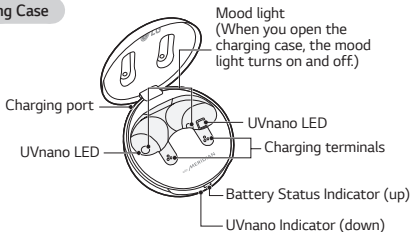

Earbuds

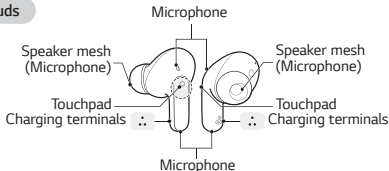

*Make sure that the charging terminal is not soiled with foreign substance.

*The appearance and specifications of the actual product may differ depending on the model.

Pairing and Connecting

Fast Pair



- 1 Turn on the *Bluetooth* function on the mobile phone or the device to be connected.
- 2 Open the cover of the charging case with the earbuds mounted on the case. Press and hold the touchpad of the left or right earbud for 3 to 5 seconds until the battery status indicator blinks in blue.



- 3 When the Fast Pair connection pop-up appears on the top area of the mobile phone screen, tap it to connect. (It only supports Android™ 6.0 or higher, and requires configuring *Bluetooth* and location information settings of the mobile device.)
- 4 If the pop-up does not appear, select [**LG-TONE-FPB**] from the *Bluetooth* menu on the mobile phone and connect it (for users of iOS or Android 5.0 or lower versions).

⚠ CAUTION: In the list of *Bluetooth* connected devices, LG-TONE-FP8_LE is not the correct model name for connection. Check the model name in use and connect with the model name without “LE”.
If the earbud model name is abnormally displayed on the Android device, change the model name in the *Bluetooth* menu of Connected Device Settings.

✓ NOTE: To connect with another device, perform the above procedure again.

Automatic Reconnection

The earbuds are connected automatically when you open the cover of the charging case. If you close the cover of the charging case with both earbuds mounted in the charging case, the earbuds are disconnected.

Wearing Earbuds

- 1 Separate the earbuds from the charging case and adjust them so that they fit comfortably in your ears.


✓ NOTE: You can use ear gels that fit your ears to improve **Active Noise Canceling (ANC)** performance and enjoy rich music sound.



2 When you wear the earbuds, you will hear a wearing detection alarm.




Playing Music



Function	Description
Play / Pause	 : Touch the left or right earbud once.
Adjusting the Volume	 : Touch the left(Decrease volume) or right(Increase volume) earbud twice.
Play Next	 : Touch the left or right earbud three times.

✓ **NOTE:** You can change the operation method of the function in the touchpad settings of the LG TONE Free app.

Mobile Calling Functions



Function	Status	Description
Answering Calls	Ringing	Touch the left or right earbud once.
Ending Calls	Talking	Touch the left or right earbud twice.
Making Calls	Idle	If you make a call using a mobile phone, the call is automatically connected to the headset.
Receiving Calls while on the Phone	Talking	If you touch the left or right earbud once, the current call will go on hold, and you will be able to answer an incoming call. If the previous call is on hold, you can finish the current call on the mobile phone. (It works differently depending on the mobile phone settings.)
Rejecting Calls	Ringing	Touch and hold the left or right earbud.

Listen to the Ambient Sound (LAS) / Active Noise Cancellation (ANC)

Listen to the Ambient Sound (LAS)



The Listen to the Ambient Sound (LAS) function allows you to listen to the ambient sound so that you can recognize the surrounding situation and any potential risks.

Active Noise Cancellation (ANC)



The Active Noise Cancellation (ANC) function blocks any ambient sound. So, you can use the function to listen to the music or watch a video without interference.

Touch and hold the left or right earbud to switch between the ANC mode and the LAS mode. You can set the LAS and ANC functions in the LG TONE Free app. You can configure the Listen to the Ambient Sound mode and Conversation mode using the LG TONE Free app.

If you use the LAS or ANC function, the battery consumes faster, reducing the time you can use the product.

You can use the LAS and ANC functions while being idle, listening to music, or being on the phone.

*ANC is an acronym for Active Noise Cancellation.



CAUTION: When the LAS mode is enabled, you may hear the ambient sound become loud suddenly. When using the ANC function outdoors, pay attention to the surrounding environment for safety.

UVnano



The charging case has a built-in UVnano LED, which allows you to use your earbuds cleanly.

If you charge the earbuds wired after mounting them on the charging case and closing the cover, the UVnano LED operates for 5 minutes.


*UVnano is a compound word derived from the words UV and its unit, nanometer.

- ✓ **NOTE:** The UVnano indicator turns on blue while the UVnano LED is on. The UVnano charging case eliminates up to 99.9% of harmful bacteria inside the earbud hole. In the case of a white product, discolouring may occur in the contact area of the UVnano LED, but it does not affect the product function.

- ⚠ **CAUTION:** Be aware that the temperature of the earbuds may rise while the UVnano LED is on.

Charging

Wired Charging



When the charging cable is connected, the charging status is displayed in the charging case.

- ✓ **NOTE:** The earbuds and the charging case are charged at the same time. The charging port on the charging case cannot be used to supply power to mobile phones, etc.

Wireless Charging



Align the bottom center of the charging case with the center of the wireless charger.

- ✓ **NOTE:** The wireless charger is not provided. The wireless charging function may not work in some wireless chargers. Wireless charging feature charges at a slower rate due to less power being transmitted to the charging case.
- If you do wireless charging, the UVnano LED sterilizes the earbuds for 5 minutes before charging.


Checking the Battery Status

If earbuds are mounted in the charging case, the earbuds' battery status is displayed.

Otherwise, the charging case's battery status is displayed.

If the earbuds are mounted in the charging case while plugged in, the UVnano process will commence for 5 minutes.

Once this process is complete, the charging case's battery status will be displayed.



Battery Status Indicator	Remaining Battery (charger not connected)	Charging State (charger connected)
Red	20% or lower	Charging
Yellow	20% - 80%	-
Green	80% or higher	Fully charged

- ✓ **NOTE:** When the charging case lid is closed, charging case battery status is displayed. If the charging case has no remaining charge, there will be no display and it cannot function. We recommend you keep the charging case charged at all times as the earbuds are not able to be turned on and turned off independently.

Battery Status Indicator

ENGLISH

Status	Description
<i>Bluetooth</i> Search Mode	The battery status indicator flashes in blue.
Battery below 20%	The battery status indicator turns on and off in red.
Battery 20% - 80%	The battery status indicator turns on and off in yellow.
Battery 80% or more	The battery status indicator turns on and off in green.
When there is a problem while charging	The battery status indicator flashes in red.
Charging (charger connected)	The battery status indicator turns on in red.
Charging complete (charger connected)	The battery status indicator turns on in green.

Out of Range

If the device connected to the product is out of effective communication range, the communication signal becomes weak and the communication is lost. The effective communication range may vary depending on surrounding and other conditions.

If the device comes back within effective communication range, the product automatically reconnects to the device. If the device is not automatically reconnected, **touch the left or right earbud** once to connect them.

LG TONE Free App

If you install the "LG TONE Free" app, you can use Check Earbud Battery, Voice Alert, Change Equalizer Mode, Check Last Connected Location Information, and Find My Earbuds functions. Check out the app for more details.

To install the "LG TONE Free" app, search LG TONE Free in the Google Play Store or App Store or scan the QR code below.

It supports Android 7.0 or higher and iOS 11 or higher.



Google Play



App Store

Troubleshooting

If you see any of the following symptoms while using the product, make sure to recheck it. It may not be a malfunction.

Symptom	Cause and Solution
The power does not turn on	Check the battery level and charge it.
If unable to make a call with earbuds	If the mobile phone does not support headset and hands-free functions, you cannot use the calling features. Check the battery level and charge it.
If unable to register earbuds to mobile phone	Check whether earbuds are turned on. Check if the earbuds have entered the search mode. - While the earbuds are inserted in the charging case, press and hold the touch pad on the left or right earbud for 3 to 5 seconds to switch to the search mode.
If you replaced the earbuds or there is a problem with the operation (Factory reset)	While the earbuds are inserted in the charging case, press and hold the touch pad on the left or right earbud for 10 seconds or more. - The battery status indicator of the charging case flashes red and the initialization to the factory status is carried out. After initialization to the factory status, reconnect the earbuds.

Specifications and Features

Item	Comments
Bluetooth Specifications	V 5.2 (Headset/Hands-Free/A2DP/AVRCP)
Battery	Earbud : 3.7 V / 68 mAh, Lithium-ion Charging case : 3.7 V / 390 mAh, Lithium-ion
Music Play Time Earbuds & With Charging case	ANC Off : Up to 10 & Up to 24 hours* ANC On : Up to 6 & Up to 15 hours*
Charging Time	Earbud : within an hour / Charging case : within 2 hours Fast Charging : 5 min charge for up to 60 min playtime* ※ When charging wired at room temperature
Rated Input Voltage	Earbud : 5 V  136 mA Charging case : 5 V  500 mA
Operating Temperature	0 °C ~ +40 °C
Operating Humidity	5 % ~ 60 %
Dimensions (mm) / Weight (g)	Earbud : 21.2 mm (W) X 28.3 mm (L) X 23.2 mm (H) / 5.2 g (One earbud) Charging case : 54.5 mm (W) X 54.5 mm (L) X 30 mm (H) / 39 g

Frequency range	2402 MHz to 2480 MHz
-----------------	----------------------

*Duration of use may vary depending on the connected mobile device, features being used, settings, signal strength, operating temperature, frequency band, and other methods of use.

Fast charging feature does not apply when charging case is placed on wireless charging device such as a pad.

Wireless charging feature charges at a slower rate due to less power being transmitted to the charging case.

Declaration of Confirmation

As per Administrative Regulations on Low Power Radio Waves Radiated Devices:

Without permission, no company, firm or user may change the frequency, increase the power, or alter features or functions of the original design of type-approved low power radio-frequency devices.

The use of low power radio-frequency devices shall not affect aircraft security or interfere with legal communications. If found to be interfering, the device shall cease operation immediately. Use of the device can be resumed only after the device has been improved to the point that it will not cause any interference. The legal communications mentioned above refer to radio communications operated in compliance with the Telecommunications Act. Low power radio-frequency devices must accept any interference from legal communications or ISM radio wave radiation-emitting devices.

Bluetooth® is a registered trademark of Bluetooth SIG, Inc. worldwide.

Android, Google Play, the Google Play logo, and other related marks and logos are trademarks of Google LLC.



Additional Information

1. Radio frequency exposure

This *Bluetooth* LG Stereo Headset is a radio transmitter and receiver. When in operation, it communicates with a *Bluetooth* equipped mobile device by receiving and transmitting radio frequency (RF) electromagnetic fields (microwaves) in the frequency range 2402 to 2480 MHz.

Your *Bluetooth* Headset is designed to operate in compliance with the RF exposure guidelines and limits set by national authorities and international health agencies when used with any compatible LG Electronics mobile phone.

2. *Bluetooth* Connection Precautions

The following environments affect the range and reception of *Bluetooth* signals:

- When walls, metal, human bodies, or other obstacles exist between the *Bluetooth* device and the connected device
- When equipment that uses 2.4 GHz frequency signals (Wireless LANs, wireless phones, microwave ovens, etc.) is placed near the devices being used
- When using a *Bluetooth* device (TV, laptop, etc.) other than the mobile phone, the sound quality may be affected by the specifications and performance of the device

3. Potentially explosive atmosphere

Turn off your electronic device when in any area with a potentially explosive atmosphere. It is rare, but your electronic device could generate sparks. Sparks in such areas could cause an explosion or fire resulting in bodily injury or even death. Areas with a potentially explosive atmosphere are often, but not always, clearly marked.

4. Battery information

A rechargeable battery has a long service life if treated properly.
A new battery or one that has not been used for a long period of time could

have reduced capacity the first few times it is used.

Do not expose the battery to extreme temperatures, never above +50° or below -10°. For maximum battery capacity, use the battery in room temperature. If the battery is used in low temperatures, the battery capacity will be reduced. The battery can only be charged in temperatures between 0° and +45°.

5. Recycling the battery in your *Bluetooth* Headset

The battery in your *Bluetooth* Headset must be disposed of properly and should never be placed in municipal waste.

6. Conditions

- The warranty is valid only if the original receipt issued to the original purchaser by the dealer, specifying the date of purchase and serial number, is presented with the product to be repaired or replaced. LG Electronics reserves the right to refuse warranty service if this information has been removed or changed after the original purchase of the product from the dealer.
- If LG Electronics repairs or replaces the product, the repaired or replaced product shall be warranted for the remaining time of the original warranty period or for ninety (90) days from the date of repair, whichever is longer. Repair or replacement may involve the use of functionally equivalent reconditioned units. Replaced parts or components will become the property of LG Electronics.

- This Warranty does not cover any failure of the product due to normal wear and tear, or due to misuse, including but not limited to use in other than the normal and customary manner, in accordance with instructions for use and maintenance of the product.

Nor does this warranty cover any failure of the product due to accident, modification or adjustment, acts of God or damage resulting from liquid.

- This warranty does not cover product failures due to improper repair installations, modifications or service performed by a non-LG Electronics authorized person. Tampering with any of the seals on the product will void the warranty.

Limited Warranty

SUBJECT TO THE CONDITIONS OF THIS LIMITED WARRANTY, LG ELECTRONICS WARRANTS THIS PRODUCT TO BE FREE FROM DEFECTS IN DESIGN, MATERIAL AND WORKMANSHIP AT THE TIME OF ITS ORIGINAL PURCHASE BY A CONSUMER, AND FOR A SUBSEQUENT PERIOD OF ONE (1) YEAR. SHOULD YOUR PRODUCT NEED WARRANTY SERVICE, PLEASE RETURN IT TO THE DEALER FROM WHOM IT WAS PURCHASED OR CONTACT YOUR LOCAL LG ELECTRONICS CONTACT CENTER TO GET FURTHER INFORMATION.

Important Safety Information

Avoiding hearing damage

Permanent hearing loss may occur if you use your Headset at a high volume. Set the volume to a safe level. You can adapt over time to a higher volume of sound that may sound normal but can be damaging to your hearing.

If you experience ringing in your ears or muffled speech, stop listening and have your hearing checked. The louder the volume, the less time is required before your hearing could be affected.

Hearing experts suggest that to protect your hearing:

- Limit the amount of time you use the headset at a high volume.
- Avoid turning up the volume to block out noisy surroundings.
- Turn the volume down if you can't hear people speaking near you.



Please refer to your handset user guide for more information on how to adjust listening levels on your handset.

Using headsets safely

Use of Headset to listen to music while operating a vehicle is not recommended and is illegal in some areas. Be careful and attentive while driving. Stop using this device if you find it disruptive or distracting while operating any type of vehicle or performing any other activity that requires your full attention.

Open Source Software Notice Information

To obtain the source code under GPL, LGPL, MPL, and other open source licenses, that is contained in this product, please visit <https://opensource.lge.com>.

In addition to the source code, all referred license terms, warranty disclaimers and copyright notices are available for download.

LG Electronics will also provide open source code to you on CD-ROM for a charge covering the cost of performing such distribution (such as the cost of media, shipping, and handling) upon email request to opensource@lge.com.

This offer is valid for a period of three years after our last shipment of this product. This offer is valid to anyone in receipt of this information.

RISK GROUP 2	
	CAUTION : UV EMITTED FROM THIS PRODUCT. EYE OR SKIN IRRITATION MAY RESULT FROM EXPOSURE. USE APPROPRIATE SHIELDING.
	WARNING : IF YOU DON'T DO CHARGING OR IF YOU OPEN THE CHARGING CASE, THE UVNANO FUNCTION IS NOT ACTIVATED.

Symbols

~	Refers to alternating current (AC).
≡	Refers to direct current (DC).
	Refers to class II equipment.
	Refers to stand-by.
I	Refers to "ON" (power).
	Refers to dangerous voltage.





HƯỚNG DẪN SỬ DỤNG

LG TONE Free

Bluetooth® Bộ tai nghe không dây

TIẾNG VIỆT

✓ **LƯU Ý:** Để có hiệu suất tốt nhất và tránh mọi thương tổn, hoặc sử dụng tai nghe sai cách, vui lòng đọc kỹ toàn bộ thông tin trước khi sử dụng tai nghe.

Chỉ LG Electronics Inc. mới có thể thực hiện bất kỳ sửa đổi hoặc thay đổi nào đối với sách hướng dẫn này do lỗi in hoặc thông tin được nêu không chính xác.

Rev 1.0 VN

TONE-FP8 / TONE-FP8W
TONE-FP8E

www.lg.com

Copyright © 2021 LG Electronics Inc. All Rights Reserved

Mục lục

Biện pháp phòng ngừa an toàn.....	1
Loa HD.....	3
Thành phần sản phẩm.....	4
Tổng quan.....	5
Ghép nối và kết nối.....	6
Đeo tai nghe.....	8
Phát nhạc.....	9
Chức năng gọi điện thoại di động.....	10
Nghe âm thanh xung quanh (LAS), Khử tiếng ồn chủ động (ANC)	11
UVnano.....	12
Đang sạc.....	13
Kiểm tra trạng thái pin	15
Đèn báo trạng thái pin.....	16
Ngoài phạm vi.....	17
Ứng dụng LG TONE Free.....	17
Khắc phục sự cố.....	18
Thông số kỹ thuật và tính năng.....	19
Tuyên bố xác nhận.....	20
Thông tin bổ sung.....	22
Bảo hành có giới hạn.....	24
Thông tin an toàn quan trọng	25
Thông tin của thông báo phản饋 nguồn mở.....	26
Ký hiệu.....	27

LG TONE Free (TONE-FP8) là tai nghe không dây có trọng lượng nhẹ sử dụng công nghệ *Bluetooth*.

Sản phẩm này có thể sử dụng làm phụ kiện âm thanh cho các thiết bị hỗ trợ A2DP hoặc Cấu hình *Bluetooth* rảnh tay.

Biện pháp phòng ngừa an toàn

Các biện pháp phòng ngừa an toàn sau đây được đưa ra để ngăn ngừa các tai nạn hoặc hư hỏng không mong muốn. Vui lòng làm quen với các biện pháp phòng ngừa an toàn này.

Các biện pháp phòng ngừa an toàn được phân loại thành "CẢNH BÁO" và "THẬN TRỌNG".

 **CẢNH BÁO:** Không tuân thủ các hướng dẫn này có thể dẫn đến thương tích nghiêm trọng hoặc tử vong.

 **THẬN TRỌNG:** Không tuân thủ các hướng dẫn này có thể dẫn đến thương tích nhẹ hoặc hư hỏng sản phẩm.

CẢNH BÁO

Không làm rơi sản phẩm từ trên cao.

Đảm bảo rằng không có nước, cồn hoặc benzen tiếp xúc với sản phẩm.

Không để sản phẩm ở nơi ẩm ướt hoặc nhiều bụi.

Không để vật nặng lên sản phẩm.

Sản phẩm này chống thấm nước đến cấp độ IPX4 (chịu được nước trong cuộc sống hàng ngày).

(Xếp hạng chống thấm nước IPX4 chỉ áp dụng cho sản phẩm tai nghe.)

Không cho sản phẩm vào nước hoặc sử dụng sản phẩm ở nơi ẩm ướt như phòng tắm.

THẬN TRỌNG

Không được tháo rời, điều chỉnh hoặc sửa chữa sản phẩm một cách tùy tiện.

Không đặt sản phẩm gần nhiệt độ quá cao hoặc vật liệu dễ cháy.

Sản phẩm có thể bị hỏng nếu sử dụng bộ sạc không tương thích.

Đảm bảo rằng trẻ sơ sinh hoặc trẻ nhỏ không nuốt phải nam châm hoặc thành phần nhỏ của sản phẩm.

Đảm bảo rằng các vật lạ không lọt vào đầu nối bộ sạc (cổng sạc và phích cắm điện). Không làm như vậy có thể dẫn đến hỏa hoạn hoặc điện giật.

Nếu bạn có thiết bị y tế cấy ghép, hãy liên hệ với bác sĩ trước khi sử dụng thiết bị này.

Sản phẩm này có pin bên trong và pin không thể tháo ra hoặc thay thế tùy ý.

Vì sự an toàn của bạn, không tháo pin lắp sẵn trong sản phẩm.

Nếu bạn tự ý thay pin hoặc thay pin không đúng cách, pin có thể phát nổ.

Pin lithium-ion là một thành phần nguy hiểm có thể gây thương tích.

Việc thay pin bởi một chuyên gia không đủ trình độ có thể gây hư hỏng cho thiết bị.

Không vứt bỏ pin tùy tiện. Vứt bỏ pin theo quy trình tại địa phương.

Nguy cơ cháy hoặc nổ nếu thay sai loại pin.

Không cất giữ hoặc vận chuyển ở áp suất thấp hơn 11,6 kPa và ở độ cao trên 15000 m.

Thay pin bằng loại không chính xác có thể làm hỏng cơ chế bảo vệ (ví dụ: trong trường hợp một số loại pin lithium).

Vút pin vào lửa hoặc lò nóng, hoặc nghiền hoặc cắt pin theo cách cơ học, có thể dẫn đến nổ.

Để pin trong môi trường xung quanh có nhiệt độ cực cao có thể gây nổ hoặc rò rỉ chất lỏng hoặc khí dễ cháy.

Pin chịu áp suất không khí cực thấp có thể dẫn đến nổ hoặc rò rỉ chất lỏng hoặc khí dễ cháy.

Không bắt cần vút bỏ pin cũ. Việc này có thể gây nổ hoặc cháy. Phương pháp vút bỏ có thể thay đổi theo quốc gia và khu vực. Vút bỏ pin theo cách thích hợp.

✓ LƯU Ý

Nếu sản phẩm tiếp xúc với quá nhiều mồ hôi, hãy lau sạch sản phẩm.

Giữ phần nhét tai sạch sẽ.

Đeo tai nghe trong một thời gian dài có thể gây đau và nếu độ ẩm bên trong tai tiếp diễn trong một thời gian dài, điều đó có thể gây vấn đề cho da.

Loa HD

Nếu mạng truyền thông của thiết bị bạn đang kết nối để hỗ trợ Cuộc gọi thoại HD, bạn có thể thực hiện cuộc gọi thoại và nghe nhạc ở độ phân giải cao.

Thành phần sản phẩm



LG TONE Free™
Tai nghe (đã lắp miếng nút
cao su tai nghe cỡ vừa)
Hộp sạc UV



Nút cao su tai
nghe bổ sung
(nhỏ và lớn)



Cáp sạc USB Type C™



Hướng dẫn sử dụng



Thẻ bảo hành

✓ **LƯU Ý:** Thiết kế sản phẩm thực tế có thể khác với hình ảnh trình bày trong hướng dẫn.



THẬN TRỌNG

Đảm bảo sử dụng các thành phần chính hãng của LG Electronics. Sử dụng thành phần không chính hãng có thể làm hỏng sản phẩm và do đó làm mất hiệu lực bảo hành.

Sử dụng cáp USB Type C™ đi kèm với sản phẩm.


✓ LƯU Ý

Bạn có thể tải xuống tài liệu hướng dẫn hoàn chỉnh từ trang web của LG Electronics.


 www.lg.com > support or service > Manuals & Downloads > Manuals

Tổng quan

Hộp sạc

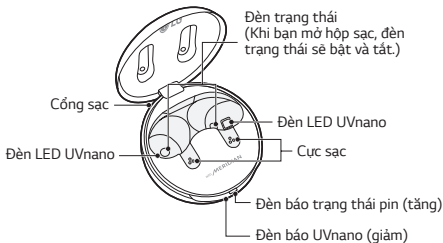

Tai nghe

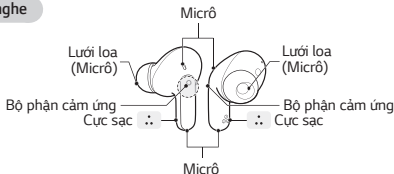

- * Đảm bảo rằng cổng sạc không có chất lạ làm bẩn.
- * Hình thức và các thông số kỹ thuật của sản phẩm thực có thể khác tùy thuộc vào mẫu sản phẩm.

Ghép nối và kết nối

Ghép nối nhanh



- 1 Bật chức năng *Bluetooth* trên điện thoại di động hoặc thiết bị cần kết nối.
- 2 Mở nắp hộp sạc với tai nghe gắn trên hộp. Nhấn và giữ bộ phận cảm ứng của tai nghe trái hoặc phải trong 3 đến 5 giây cho đến khi đèn báo trạng thái pin nhấp nháy màu xanh lam.



- 3 Khi cửa sổ bật lên cho kết nối Ghép nối nhanh xuất hiện ở khu vực trên cùng của màn hình điện thoại di động, hãy nhấn vào đó để kết nối. (Chức năng này chỉ hỗ trợ Android 6.0 trở lên và yêu cầu định cấu hình *Bluetooth* và cài đặt thông tin vị trí của thiết bị di động.)
- 4 Nếu cửa sổ bật lên không xuất hiện, chọn **[LG-TONE-FPB]** từ menu *Bluetooth* trên điện thoại di động và kết nối (đối với người dùng iOS hoặc Android 5.0 hoặc phiên bản thấp hơn).



THẬN TRỌNG: Trong danh sách các thiết bị kết nối *Bluetooth*, LG-TONE-FPB_LE không phải là tên kiểu máy chính xác cho kết nối. Kiểm tra tên kiểu máy đang được sử dụng và kết nối với tên kiểu máy không có chữ "LE".

Nếu tên mẫu tai nghe được hiển thị bất thường trên thiết bị Android, hãy thay đổi tên mẫu sản phẩm trong menu *Bluetooth* của Cài đặt Thiết bị Kết nối.



LƯU Ý: Để kết nối với thiết bị khác, hãy thực hiện lại quy trình trên.

Kết nối lại tự động

Tai nghe được kết nối tự động khi bạn mở nắp hộp sạc. Nếu bạn đóng nắp hộp sạc với cả hai tai nghe được gắn trong hộp sạc, tai nghe sẽ bị ngắt kết nối.

Đeo tai nghe

1 Lấy tai nghe ra khỏi hộp sạc và điều chỉnh sao cho vừa vặn với tai bạn.

✓ **LƯU Ý:** Bạn có thể sử dụng gel tai vừa khít với tai để cải thiện hiệu suất khử tiếng ồn chủ động (ANC) và thưởng thức âm thanh phong phú.



2 Khi bạn đeo tai nghe, bạn sẽ nghe thấy âm báo phát hiện đeo.



Phát nhạc




Chức năng	Mô tả
Phát / Tạm dừng	 : Chạm vào tai nghe bên trái hoặc bên phải một lần.
Điều chỉnh âm lượng	 : Chạm vào tai nghe bên trái (Giảm âm lượng) hoặc phải (Tăng âm lượng) hai lần.
Phát tiếp theo	 : Chạm vào tai nghe bên trái hoặc phải ba lần.

TIẾNG VIỆT

- ✓ **LƯU Ý:** Bạn có thể thay đổi phương thức hoạt động của chức năng trong cài đặt bộ phận cảm ứng của ứng dụng LG TONE Free.

Chức năng gọi điện thoại di động



Chức năng	Tình trạng	Mô tả
Trả lời cuộc gọi	Đổ chuông	Chạm vào tai nghe bên trái hoặc bên phải một lần.
Kết thúc cuộc gọi	Nói chuyện	Chạm vào tai nghe bên trái hoặc bên phải hai lần.
Thực hiện cuộc gọi	Đang rảnh	Nếu bạn thực hiện cuộc gọi bằng điện thoại di động, cuộc gọi sẽ tự động kết nối với tai nghe.
Nhận cuộc gọi khi đang nghe điện thoại	Nói chuyện	Nếu bạn chạm vào tai nghe trái hoặc phải một lần, cuộc gọi hiện tại sẽ vào chế độ chờ và bạn sẽ có thể trả lời cuộc gọi đến. Nếu cuộc gọi trước ở chế độ chờ, bạn có thể kết thúc cuộc gọi hiện tại trên điện thoại di động. (Chức năng hoạt động khác nhau tùy thuộc vào cài đặt điện thoại di động.)
Từ chối cuộc gọi	Đổ chuông	Chạm và giữ tai nghe bên trái hoặc bên phải.

Nghe âm thanh xung quanh (LAS), Khử tiếng ồn chủ động (ANC)

Nghe âm thanh xung quanh (LAS)



Chức năng Nghe âm thanh xung quanh (LAS) cho phép bạn nghe âm thanh xung quanh để có thể nhận biết tình hình xung quanh và mọi rủi ro tiềm ẩn.

Khử tiếng ồn chủ động (ANC)



Chức năng Khử tiếng ồn chủ động (ANC) chặn mọi âm thanh xung quanh. Vì vậy, bạn có thể sử dụng chức năng này để nghe nhạc hoặc xem video mà không bị làm phiền.

Chạm và giữ tai nghe bên trái hoặc bên phải để chuyển giữa chế độ ANC và chế độ LAS.

Bạn có thể đặt các chức năng LAS và ANC trong ứng dụng LG TONE Free.

Bạn có thể định cấu hình chế độ Nghe âm thanh xung quanh và chế độ Hủy tiếng ồn bằng ứng dụng LG TONE Free.

Nếu bạn sử dụng chức năng LAS hoặc ANC, pin sẽ tiêu thụ nhanh hơn, làm giảm thời gian sử dụng sản phẩm.

Bạn có thể sử dụng các chức năng LAS và ANC khi đang không sử dụng, nghe nhạc hoặc sử dụng điện thoại.

*ANC là từ viết tắt của Active Noise Cancellation (Khử tiếng ồn chủ động).

⚠ THẬN TRỌNG: Khi chế độ LAS bật, bạn có thể nghe thấy âm thanh xung quanh trở nên to đột ngột. Khi sử dụng chức năng ANC ở ngoài trời, hãy lưu ý đến môi trường xung quanh để đảm bảo an toàn.

UVnano



Hộp sạc có đèn LED UVnano tích hợp, cho phép bạn sử dụng tai nghe một cách sạch sẽ.

Nếu bạn sạc tai nghe bằng dây cáp sau khi lắp chúng vào hộp sạc và đóng nắp, đèn LED UVnano hoạt động trong 5 phút.

*UVnano là từ ghép từ các từ UV và đơn vị của UV, nanomet.



LƯU Ý: Đèn báo UVnano bật sáng màu xanh lam trong khi đèn LED UVnano đang bật.

Hộp sạc UVnano loại bỏ tới 99,9% vi khuẩn có hại bên trong lỗ tai nghe.


Trong trường hợp sản phẩm có màu trắng, vùng tiếp xúc của đèn LED UVnano có thể bị đổi màu, nhưng không ảnh hưởng đến chức năng của sản phẩm.



THẬN TRỌNG: Lưu ý rằng nhiệt độ của tai nghe có thể tăng lên trong khi đèn LED UVnano đang hoạt động.

Đang sạc

Sạc có dây

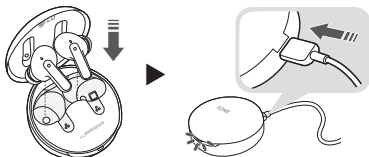


Khi cáp sạc được kết nối, trạng thái sạc được hiển thị trong hộp sạc.

✓ **LƯU Ý:** Tai nghe và hộp sạc được sạc cùng lúc.

Không thể sử dụng cổng sạc trên hộp sạc để cung cấp điện cho điện thoại di động, v.v.

Sạc không dây



TIẾNG VIỆT

Căn điểm giữa bên dưới của hộp sạc với điểm giữa của bộ sạc không dây.

- ✓ **LƯU Ý:** Không đi kèm bộ sạc không dây. Chức năng sạc không dây có thể không hoạt động với một số bộ sạc không dây. Tính năng sạc không dây sạc với tốc độ chậm hơn do có ít năng lượng hơn được truyền đến hộp sạc. Nếu bạn sạc không dây, đèn LED UVnano sẽ khử trùng tai nghe trong 5 phút trước khi sạc.


Kiểm tra trạng thái pin

Nếu tai nghe được gắn trong hộp sạc, trạng thái pin của tai nghe nhét tai được hiển thị.

Nếu không, trạng thái pin của hộp sạc được hiển thị.

Nếu tai nghe được gắn trong hộp sạc trong khi cắm điện, quá trình UVnano sẽ bắt đầu trong 5 phút.

Khi quá trình này hoàn tất, trạng thái pin của hộp sạc sẽ được hiển thị.



Đèn báo trạng thái pin	Pin còn lại (bộ sạc không kết nối)	Trạng thái sạc (bộ sạc có kết nối)
Đỏ	20% trở xuống	Đang sạc
Vàng	20% - 80%	-
Xanh lá	80% trở lên	Được sạc đầy

TIẾNG VIỆT

- ✓ **LƯU Ý:** Khi nắp hộp sạc đóng, trạng thái pin của hộp sạc được hiển thị. Nếu hộp sạc không còn điện, sẽ không có hiển thị và thiết bị không thể hoạt động. Chúng tôi khuyên bạn luôn giữ hộp sạc có điện vì tai nghe không thể bật và tắt độc lập.

Đèn báo trạng thái pin

Tình trạng	Mô tả
Chế độ tìm kiếm <i>Bluetooth</i>	Đèn báo trạng thái pin nhấp nháy màu xanh lam.
Pin dưới 20%	Đèn báo trạng thái pin bật và tắt màu đỏ.
Pin 20% - 80%	Đèn báo trạng thái pin bật và tắt màu vàng.
Pin từ 80% trở lên	Đèn báo trạng thái pin bật và tắt màu xanh lục.
Khi có vấn đề trong khi sạc	Đèn báo trạng thái pin nhấp nháy màu đỏ.
Đang sạc (bộ sạc được kết nối)	Đèn báo trạng thái pin bật màu đỏ.
Sạc đã hoàn thành (bộ sạc được kết nối)	Đèn báo trạng thái pin bật màu xanh lục.

Ngoài phạm vi

Nếu thiết bị kết nối với sản phẩm nằm ngoài phạm vi giao tiếp hiệu quả, tín hiệu liên lạc sẽ yếu và mất liên lạc. Phạm vi giao tiếp hiệu quả có thể thay đổi tùy thuộc vào các điều kiện xung quanh và các điều kiện khác.

Nếu thiết bị quay lại phạm vi giao tiếp hiệu quả, sản phẩm sẽ tự động kết nối lại với thiết bị. Nếu thiết bị không tự động kết nối lại, **chạm vào tai nghe bên trái hoặc bên phải** một lần để kết nối tai nghe.

Ứng dụng LG TONE Free

Nếu bạn cài đặt ứng dụng “LG TONE Free”, bạn có thể sử dụng các chức năng Kiểm tra pin tai nghe, Cảnh báo bằng giọng nói, Thay đổi chế độ bộ chỉnh âm, Kiểm tra thông tin vị trí được kết nối lần cuối và Tìm tai nghe của tôi. Kiểm tra ứng dụng để biết thêm chi tiết.

Để cài đặt ứng dụng “LG TONE Free”, tìm kiếm LG TONE Free trong Cửa hàng Google Play hoặc App Store hoặc quét mã QR bên dưới.

Ứng dụng này hỗ trợ Android 7.0 trở lên và iOS 11 trở lên.



Google Play



App Store

Khắc phục sự cố

Nếu bạn thấy bất kỳ triệu chứng nào sau đây trong khi sử dụng sản phẩm, hãy kiểm tra lại sản phẩm. Đây có thể không phải là sự cố.

TIẾNG VIỆT

Triệu chứng	Nguyên nhân và giải pháp
Nguồn không bật	Kiểm tra mức pin và sạc pin.
Nếu bạn không thể thực hiện cuộc gọi bằng tai nghe	Nếu điện thoại di động không hỗ trợ chức năng tai nghe và Rảnh tay, bạn không thể sử dụng các tính năng gọi điện. Kiểm tra mức pin và sạc pin.
Nếu bạn không thể đăng ký tai nghe với điện thoại di động	Hãy kiểm tra xem bạn đã bật tai nghe chưa. Kiểm tra xem tai nghe đã vào chế độ tìm kiếm chưa. - Trong khi tai nghe được lắp vào hộp sạc, hãy nhấn và giữ bộ phận cảm ứng ở tai nghe trái hoặc phải trong 3 đến 5 giây để chuyển sang chế độ tìm kiếm.
Nếu bạn đã thay tai nghe hoặc có vấn đề với hoạt động (Đặt lại về cài đặt gốc)	Trong khi tai nghe được lắp vào hộp sạc, hãy nhấn và giữ bộ phận cảm ứng ở tai nghe trái hoặc phải trong 10 giây hoặc lâu hơn. - Đèn báo trạng thái pin của hộp sạc nhấp nháy màu đỏ và việc khởi tạo về cài đặt gốc được thực hiện. Sau khi khởi tạo về cài đặt gốc, hãy kết nối lại tai nghe.

Thông số kỹ thuật và tính năng

Mục	Nhận xét
<i>Bluetooth</i> Thông số kỹ thuật	V 5.2 (Tai nghe/Rảnh tay/A2DP/AVRCP)
Pin	Tai nghe : 3.7 V / 68 mAh, Lithium-ion Hộp sạc : 3.7 V / 390 mAh, Lithium-ion
Thời gian nghe nhạc Tai nghe & có hộp sạc	ANC Tắt: Lên đến 10 & Lên đến 24 giờ* ANC Bật: Lên đến 6 & Lên đến 15 giờ*
Thời gian sạc	Tai nghe: trong một giờ / Hộp sạc: trong 2 giờ Sạc nhanh: Sạc 5 phút cho thời gian chơi lên đến 60 phút* ※ Khi sạc có dây ở nhiệt độ phòng
Điện áp đầu vào định mức	Tai nghe: 5 V  136 mA Hộp sạc: 5 V  500 mA
Nhiệt độ hoạt động	0 °C ~ +40 °C
Độ ẩm hoạt động	5 % ~ 60 %
Kích thước (mm) / Trọng lượng (g)	Tai nghe: 21,2 mm (rộng) X 28,3 mm (dài) X 23,2 mm (cao) / 5,2 g (Một tai nghe) Hộp sạc: 54,5 mm (rộng) X 54,5 mm (dài) X 30 mm (cao) / 39 g

Dải tần số	2402 MHz đến 2480 MHz
------------	-----------------------

*Thời gian sử dụng có thể thay đổi tùy thuộc vào thiết bị di động kết nối, các tính năng đang được sử dụng, cài đặt, cường độ tín hiệu, nhiệt độ hoạt động, dải tần và các phương pháp sử dụng khác.

Tính năng sạc nhanh không áp dụng khi hộp sạc được đặt trên thiết bị sạc không dây như tấm sạc.

Tính năng sạc không dây sạc với tốc độ chậm hơn do có ít năng lượng hơn được truyền đến hộp sạc.

Tuyên bố xác nhận

Theo Quy định hành chính về thiết bị bức xạ sóng vô tuyến công suất thấp:

Nếu không được phép, không công ty hoặc người dùng nào có thể thay đổi tần số, tăng công suất hoặc thay đổi các tính năng hoặc chức năng của thiết kế ban đầu của các thiết bị tần số vô tuyến công suất thấp được phê duyệt về loại.

Việc sử dụng các thiết bị tần số vô tuyến công suất thấp không được ảnh hưởng đến an ninh hàng không hoặc gây nhiễu cho các hoạt động truyền thông hợp pháp. Nếu phát hiện thấy sự gây nhiễu, thiết bị phải ngừng hoạt

động ngay lập tức. Việc sử dụng thiết bị chỉ có thể tiếp tục sau khi thiết bị đã được cài thiện đến mức sẽ không gây ra bất kỳ nhiễu nào. Hoạt động truyền thông hợp pháp được đề cập ở trên là nói đến truyền thông vô tuyến được vận hành tuân thủ Đạo luật về Viễn thông.

Các thiết bị tần số vô tuyến công suất thấp phải chấp nhận mọi sự can nhiễu từ các hoạt động truyền thông hợp pháp hoặc các thiết bị phát xạ sóng vô tuyến ISM.

Bluetooth® là nhãn hiệu đã đăng ký của Bluetooth SIG, Inc. trên toàn thế giới.

Android, Google Play, logo Google Play và các nhãn hiệu và logo liên quan khác là nhãn hiệu của Google LLC.



Thông tin bổ sung

1. Phoi nhiễm tần số vô tuyến

Tai nghe *Bluetooth* LG Stereo này là thiết bị phát và thu sóng vô tuyến. Khi ở chế độ hoạt động, thiết bị giao tiếp với thiết bị di động được trang bị *Bluetooth* bằng cách nhận và truyền các trường điện từ tần số vô tuyến (RF) (sóng vi ba) trong dải tần số 2402 đến 2480 MHz.

Tai nghe *Bluetooth* được thiết kế hoạt động tuân thủ các hướng dẫn và giới hạn phơi nhiễm RF do các cơ quan có thẩm quyền của quốc gia và các cơ quan y tế quốc tế đặt ra khi được sử dụng với bất kỳ điện thoại di động tương thích nào của LG Electronics.

2. Các biện pháp phòng ngừa về kết nối *Bluetooth*

Các môi trường sau đây ảnh hưởng đến phạm vi và khả năng tiếp nhận tín hiệu *Bluetooth*:

- Khi có các bức tường, kim loại, cơ thể con người hoặc các chương ngại vật khác giữa thiết bị *Bluetooth* và thiết bị kết nối
- Khi thiết bị sử dụng tín hiệu tần số 2,4 GHz (mạng LAN không dây, điện thoại không dây, lò vi sóng, vv.) được đặt gần các thiết bị đang được sử dụng
- Khi sử dụng thiết bị *Bluetooth* (TV, máy tính xách tay, vv.) ngoài điện thoại di động, chất lượng âm thanh có thể bị ảnh hưởng bởi thông số kỹ thuật và hiệu suất của thiết bị

3. Bầu không khí có khả năng gây nổ

Tất thiết bị điện tử của bạn khi ở bất kỳ khu vực nào có bầu không khí có khả năng gây nổ. Hiếm khi xảy ra, nhưng thiết bị điện tử của bạn có thể tạo ra tia lửa. Tia lửa ở những khu vực như vậy có thể gây nổ hoặc cháy dẫn đến thương tích cơ thể hoặc thậm chí tử vong. Các khu vực có bầu không khí có khả năng gây nổ thường có đánh dấu rõ ràng, nhưng không phải lúc nào cũng như vậy.

4. Thông tin về pin

Pin sạc có tuổi thọ dài nếu được xử lý đúng cách.

Pin mới hoặc pin không được sử dụng trong một thời gian dài có thể có dung lượng suy giảm trong vài lần đầu tiên sử dụng pin.

Không để pin ở nhiệt độ khắc nghiệt, không bao giờ trên +50° hoặc dưới -10°. Để có dung lượng pin tối đa, hãy sử dụng pin ở nhiệt độ phòng. Nếu pin được sử dụng ở nhiệt độ thấp, dung lượng pin sẽ giảm. Pin chỉ có thể sạc ở nhiệt độ từ 0° đến +45°.

5. Tái chế pin trong tai nghe *Bluetooth* của bạn

Pin trong tai nghe *Bluetooth* của bạn phải được vứt bỏ đúng cách và không được cho vào rác thải sinh hoạt.

6. Điều kiện

- Bảo hành chỉ có hiệu lực khi phiếu thu gốc do đại lý cấp cho người mua ban đầu, ghi rõ ngày mua và số sê-ri, được xuất trình cùng với sản phẩm cần sửa chữa hoặc thay thế. LG Electronics có quyền từ chối dịch vụ bảo hành nếu thông tin này đã bị xóa hoặc thay đổi sau khi mua sản phẩm ban đầu từ đại lý.

- Nếu LG Electronics sửa chữa hoặc thay thế sản phẩm, sản phẩm được sửa chữa hoặc thay thế sẽ được bảo hành trong thời gian còn lại của thời hạn bảo hành ban đầu hoặc trong chín mươi (90) ngày kể từ ngày sửa chữa, tính theo khoảng thời gian dài hơn. Việc sửa chữa hoặc thay thế có thể sử dụng các bộ phận tân trang có chức năng tương đương. Các bộ phận hoặc linh kiện được thay thế sẽ trở thành tài sản của LG Electronics.
- Bảo hành này không bảo hành cho bất kỳ lỗi nào của sản phẩm do hao mòn thông thường, hoặc do sử dụng sai, bao gồm nhưng không chỉ giới hạn ở việc sử dụng khác với cách bình thường và thông thường, theo hướng dẫn sử dụng và bảo trì sản phẩm.
Bảo hành này cũng không bảo hành cho bất kỳ lỗi nào của sản phẩm do tai nạn, sửa đổi hoặc điều chỉnh, tình trạng bất khả kháng hoặc thiệt hại do chất lỏng.
- Bảo hành này không bảo hành cho lỗi sản phẩm do sửa chữa, cài đặt, sửa đổi hoặc bảo dưỡng được thực hiện không đúng cách bởi người không có ủy quyền của LG Electronics. Sự can thiệp vào bất kỳ niêm phong nào trên sản phẩm sẽ làm mất hiệu lực bảo hành.

Bảo hành có giới hạn

TUÂN THEO CÁC ĐIỀU KIỆN CỦA BẢO HÀNH CÓ GIỚI HẠN NÀY, LG ELECTRONICS ĐẢM BẢO SẢN PHẨM NÀY KHÔNG CÓ KHIẾM KHUYẾT VỀ THIẾT KẾ, VẬT LIỆU VÀ TAY NGHỀ TẠI THỜI ĐIỂM NGƯỜI TIÊU DÙNG MUA BAN ĐẦU VÀ TRONG KHOẢNG THỜI GIAN MỘT (1) NĂM TIẾP THEO. NẾU SẢN PHẨM CỦA BẠN CẦN DỊCH VỤ BẢO HÀNH, VUI LÒNG GỬI TRẢ LẠI SẢN PHẨM CHO ĐẠI LÝ NƠI ĐÃ MUA SẢN PHẨM HOẶC LIÊN HỆ VỚI TRUNG

TÂM LIÊN HỆ LG ELECTRONICS TẠI ĐỊA PHƯƠNG CỦA BẠN ĐỂ BIẾT THÊM THÔNG TIN.

Thông tin an toàn quan trọng

Tránh gây tổn thương thính giác

Sự mất thính lực vĩnh viễn có thể xảy ra nếu bạn sử dụng tai nghe ở mức âm lượng cao. Hãy đặt âm lượng ở mức an toàn. Bạn có thể thích nghi theo thời gian với âm lượng cao hơn mà nghe có vẻ như bình thường nhưng có thể gây tổn hại cho thính giác của bạn.

Nếu bạn gặp phải tiếng chuông trong tai hoặc lời nói bị bóp nghẹt, hãy ngừng nghe và kiểm tra thính giác của bạn. Âm lượng càng lớn, thời gian cho đến khi thính giác của bạn có thể bị ảnh hưởng càng ngắn.

Các chuyên gia thính giác khuyến nghị rằng để bảo vệ thính giác của bạn:

- Hạn chế thời gian bạn sử dụng tai nghe ở mức âm lượng lớn.
- Tránh tăng âm lượng để chặn tiếng ồn từ môi trường xung quanh.
- Giảm âm lượng nếu bạn không thể nghe thấy mọi người nói gần bạn.



Vui lòng tham khảo hướng dẫn sử dụng thiết bị cầm tay để biết thêm thông tin về cách điều chỉnh mức âm lượng trên thiết bị cầm tay của bạn.

Sử dụng tai nghe an toàn

Việc sử dụng tai nghe để nghe nhạc trong khi điều khiển xe là không nên và là việc bất hợp pháp ở một số khu vực. Hãy cẩn thận và tập trung trong khi lái xe. Ngừng sử dụng thiết bị này nếu bạn thấy thiết bị gây rối hoặc mất tập trung trong khi điều khiển bất kỳ loại xe nào hoặc thực hiện bất kỳ hoạt động nào khác yêu cầu bạn phải tập trung hoàn toàn.

Thông tin của thông báo phần mềm nguồn mở

Để nhận mã nguồn theo GPL, LGPL, MPL và các giấy phép nguồn mở khác, được bao gồm trong sản phẩm này, vui lòng truy cập <https://opensource.lge.com>. Ngoài mã nguồn, tất cả các điều khoản cấp phép, tuyên bố từ chối trách nhiệm và thông báo bản quyền được tham chiếu đều có sẵn để tải xuống.

LG Electronics cũng sẽ cung cấp mã nguồn mở cho bạn trong CD-ROM có tính phí để chi trả cho chi phí phát hành (chẳng hạn như các khoản phí về vận chuyển, đĩa và xử lý) khi nhận được yêu cầu qua email đến địa chỉ opensource@lge.com.

Ưu đãi này có hiệu lực trong khoảng thời gian ba năm tính từ ngày chúng tôi phân phối sản phẩm này. Ưu đãi này có hiệu lực đối với bất kỳ ai nhận được thông tin này.

NHÓM NGUY CƠ 2



THẬN TRỌNG : TIA UV ĐƯỢC PHÁT RA TỪ SẢN PHẨM NÀY. PHƠI NHIỄM CÓ THỂ GÂY NÊN SỰ KÍCH ỨNG CỦA MẮT HOẶC DA. SỬ DỤNG CHE CHẮN THÍCH HỢP.

CẢNH BÁO : NẾU BẠN KHÔNG SẠC HOẶC NẾU BẠN MỞ HỘP SẠC, CHÚC NẮNG UVNANO KHÔNG ĐƯỢC KÍCH HOẠT.

TIẾNG VIỆT


Ký hiệu

~	Đề cập đến dòng điện xoay chiều (AC).
---	Đề cập đến dòng điện một chiều (DC).
□	Đề cập đến thiết bị class II.
⏻	Đề cập đến chế độ chờ.
I	Đề cập đến "BẬT" (nguồn).
⚡	Đề cập đến điện áp nguy hiểm.

LG TONE Free

Thời hạn bảo hành: 12 tháng tính từ Ngày mua
Mọi thắc mắc liên quan đến sản phẩm, vui lòng liên hệ:
Công ty LG Electronics Việt Nam Hải Phòng - Văn phòng Hà Nội
Phòng Bảo hành
Địa chỉ: Tầng 25, Tòa nhà Keangnam Landmark 72,
Lô E6, Đường Phạm Hùng, P. Mỹ Trì, Q. Nam Từ Liêm, Hà Nội
Trung tâm Hỗ trợ khách hàng: 1800-1503 / Website: www.lg.com/vn







UG-FP8-VN-01